

Energy efficiency planning guidance for Dartmouth Park Conservation Area



Introduction

Executive Summary

It is increasingly recognised that climate change will affect all our lives and those of future generations, with global changes having local impacts. We need to respond to this by greatly reducing Camden's impact on the environment and taking measures to deal with the effects of climate change in the borough.

Camden's built environment is of high quality and 75% of its developed areas are protected by conservation area status. This brings with it a responsibility to preserve and enhance its special character and appearance. The National Planning Policy Framework (March 2012) provides the basis by which the planning issues of conservation and environmental sustainability are jointly considered. This requires that 'great weight' is given to the conservation of these heritage assets as we support residents in the borough to make the transition to a low carbon future.

Because our response to the pressing issue of climate change must be sensitive to the borough's many areas of high environmental quality and heritage significance, this guidance has been produced to give detailed advice to homeowners within Dartmouth Park Conservation Area on how to take positive actions to improve the energy efficiency of their homes while also protecting the local distinctiveness of the area.

The guidance shows that historic homes of the types found in Camden's conservation areas can be made more energy efficient, often through relatively minor and easy interventions, and still retain their special character and appearance. Where major energy efficiency measures are required, the guidance sets out how and where these are likely to be acceptable.

A structured approach is set out which homeowners should use to decide how and where to take action and allows for a consideration of the relative costs, impacts and benefits of a range of measures which will influence homeowners' choices.

Whilst the guidance is targeted at homeowners, it also recognises that Council tenants or leaseholders and private sector tenants and landlords will also wish to take part in improving the energy efficiency of their homes. Advice on measures that they or their freeholders may be able to carry out in their homes and on sources of grant funding for energy efficiency works are included in the appendices.

This document was adopted, following public consultation, on 23 August 2012.

Acknowledgements

Peter Rickaby, Rickaby Thompson Associates who advised on the development of the guidance, and contributed to the document and presented to the public.

The working group of Dartmouth Park residents who, between November 2011 and July 2012, commented on the scope, structure and content of the guidance.


Dartmouth Park Conservation Area Advisory Committee

Introduction

SECTION 1. The context



SECTION 2. Making a low carbon retrofit plan



SECTION 3. Seeking planning permission



SECTION 4. Technical guidance on energy efficiency measures



Introduction

Contents	page		
Section 1 The context	5	Section 4 Technical guidance on energy efficiency measures	24
1.1 Climate change and energy use	5	4.1 Insulation	24
1.2 Energy efficiency and traditional buildings	5	4.2 Windows, external doors and draught lobbies	30
1.3 Rising energy costs and resource depletion	6	4.3 Air tightness	31
1.4 The Green Deal	6	4.4 Ventilation	32
		4.5 Heating and hot water systems, including solar hot water and biomass	35
Section 2 Making a low carbon retrofit plan	7	4.6 Photovoltaic electricity generation	38
Initial Assessment	7	4.7 Heat pumps	39
Design stage – prioritising work	7	4.8 Domestic combined heat and power	40
Implementation	8		
		Appendices	
Section 3 Seeking Planning Permission	10	A1 Advice for Council tenants and leaseholders	41
What requires planning permission	10	A2 Advice for Private Sector landlords and tenants	41
Planning Guidance	13	A3 Sources of further advice and information	42
External solid wall insulation	15	A4 Information on suppliers, fitters, architects etc	43
Windows	21	A5 Glossary	45
Porches, draught lobbies and front doors	22		
Solar PV (Electricity generation) and Solar Thermal (Hot water) mounted on a building	22		
Air source heat pumps	23		
Biomass heating systems	23		

SECTION 1. The context



1.1 Climate change and energy use

Climate change is already affecting people around the world. It is recognised that the burning of fossil fuels and the associated carbon dioxide emissions are key contributors to climate change and, to address this, the UK has committed to an 80% reduction in greenhouse gas emissions by 2050.

Over 25% of UK greenhouse gas emissions come from our housing and over 90% of these emissions stem from heating and powering homes that were built before the 1980s. Improving the energy efficiency of our older homes will therefore play an essential part in achieving national emissions reduction targets.

Camden has set its own borough wide carbon dioxide emissions reduction target of 40% by 2020. The Council's approach to meeting this target is set out in a carbon reduction study that can be found at www.camden.gov.uk/greenaction.

The study highlights three key areas of focus for achieving the target:

- Supporting programmes that help decarbonise the national grid, for example national and local renewable energy generation projects
- Improving the energy efficiency of over half of the existing houses in Camden, alongside changes in the way we use our homes
- Combined heat and power (CHP) energy networks principally around commercial growth areas in Camden

For further information on how you can help Camden contribute to national climate change work please visit www.camden.gov.uk/green



1.2 Energy efficiency and traditional buildings

Camden benefits greatly from having a high number of historic buildings of significant quality which enhance the appearance and interest of its built environment. Many homes in the borough are Georgian or Victorian and large numbers of these are listed or fall within conservation areas. The Council requires development in conservation areas to preserve and enhance the special character and appearance of the area.

The methods and materials used in the construction of traditional buildings are different to a building built to modern building standards and in their unimproved state are likely to have a lower energy performance. Sizable improvements to the energy performance of these buildings can be made, but a careful and considered approach must be taken which recognises the nature of their architectural and historic significance and understands the impacts of measures on the way the traditional construction works. This will ensure that beneficial energy efficiency measures do not cause damage to the building fabric or the appearance of the buildings and the area.

Regular maintenance and repair of traditional houses is an essential precursor to making energy efficiency improvements. It will ensure that building elements perform their best and will also prevent costly damage. A useful maintenance checklist is available at www.english-heritage.org.uk/your-property

SECTION 1. The context



1.3 Rising energy costs and resource depletion

Energy price inflation is a complex issue influenced by a range of political, commercial and physical conditions. However there is an appreciation that the fossil fuels we rely on to heat and power our homes are becoming increasingly scarce and contested and that energy prices are therefore likely to continue to rise. In order to address increasing levels of fuel poverty in our communities (defined as occurring when a household spends over 10% of its disposable income on energy used to heat the home adequately) a positive, innovative and inclusive approach to improving the energy efficiency of all homes is essential.



1.4 The Green Deal

The Government recognises the need for a step-change in the energy performance of our nation's existing homes and is targeting energy efficiency improvements to 7 million homes nationally by 2020.

To finance this programme, the Government will be launching the Green Deal programme in late 2012. Under the Green Deal, householders will be able to appoint a nationally accredited Green Deal provider to arrange installation of appropriate energy efficiency measures (such as insulation and double glazing) in their home at no up-front cost. The householder would effectively enter into a contract with the Green Deal provider to pay a charge for the measures on the basis that the charge would be less than or equal to the energy savings resulting from the energy efficiency improvements. The residents only pay the charge while they are in occupation and enjoying the benefits of the improvements; after they move, the charge is paid by the next occupants. The 'Golden Rule' is that annual repayments via


the charge must never exceed the expected fuel cost savings associated with the improvements.

Further information on the Green Deal is available at www.decc.gov.uk/greendeal, www.camden.gov.uk/greendeal and in the Institute for Sustainability's Retrofit Guide A (see Appendices for reference).

Camden Council recognises that some energy efficiency measures can affect the character and appearance of the homes at which they are installed, and in the case of traditional buildings may have deleterious impacts on their fabric if not designed and implemented very carefully. It is particularly concerned to manage Green Deal delivery in Camden's conservation areas in a way that supports residents who wish to participate whilst also protecting our valuable architectural heritage.

Although we cannot yet be sure of the levels of Green Deal interest and uptake in Camden, we hope that this guidance will limit the potentially negative impact of uncontrolled Green Deal delivery on Camden's historic built environment.

Section 2. Making a low carbon retrofit plan



Unless you are planning major work to your home improving its energy performance is likely to be a gradual process punctuated by different scales of intervention at various trigger points, for example upgrading heating controls when replacing an old boiler.

Regardless of scale, it makes sense to establish a 'low carbon retrofit plan' for your home that considers the potential energy efficiency technologies you could employ alongside an assessment of the heritage significance of your home. By reflecting on these areas together, the retrofit solution is more likely to secure environmental benefits to your home in a way that is not detrimental to the character and appearance of the building or conservation area.

The following "Low carbon retrofit plan" framework can be used to achieve these objectives.

2.1 Initial assessment

An initial assessment of your home will help establish retrofitting opportunities which align with both the future plans for your home and the constraints of the conservation area setting. It typically follows these key steps:

- Assess the heritage significance of your home by reviewing the Dartmouth Park Conservation Area Appraisal and Management Strategy (2009) (www.camden.gov.uk/planning) and identify areas where change is unlikely to be acceptable. For example, if the rear elevations of houses in your street are part of a uniform architectural composition, visible from the public realm and/or of noted value in the Conservation Area Appraisal, introducing rendered external insulation to them is unlikely to be acceptable. The planning guidance in section 3 will also help you assess what is likely to be considered acceptable.
- Assess the condition of building fabric and building services to identify elements of your home that need repair, renovation or replacement and consider the linked opportunities. For example, if your boiler needs replacing introducing a solar hot water system at the same time is likely to produce savings across both technologies.


- Assess your home for opportunities for low cost energy efficiency measures that will not detract from the heritage significance of the property, for example, draught-proofing or low energy appliances.
- Identify areas within your home that you are considering changing or renewing to identify associated opportunities. For example, if you are planning a new bathroom in an existing rear extension, adding internal wall insulation at the same time would be less disruptive than carrying out these works separately.
- The assessment should result in a list of potential energy efficiency measures that are likely to be compliant with planning policy and aligned with any future plans for your home.

2.2 Design stage – prioritising

Once you have completed the initial assessment and clearly defined the areas of your home where energy efficiency improvements can be made, the next step is to establish how to prioritise work.

The best way to prioritise energy efficiency work is through the application of the **energy hierarchy** principle. The energy hierarchy prioritises lower cost demand reduction and passive energy efficiency measures, such as behaviour change, insulation and draught-proofing, over higher cost active systems like condensing boilers and renewable energy technologies.

Section 2. Making a low carbon retrofit plan



Behavioural changes can reduce your domestic energy use by up to about 10%. Things to try include:

- Closing curtains (or shutters) at dusk.
- Turning off lights in rooms that are unoccupied or where there is good daylight.
- Not leaving appliances such as televisions and computers on 'stand by' mode.
- Not leaving chargers for telephones, games consoles, etc, plugged in when not in use
- Ensuring that appliances such as washing machines are not run part-loaded.
- Reducing the duration of showers (perhaps by using a shower timer).
- Avoiding leaving taps running when washing up, shaving or cleaning teeth.
- Programming the heating to ensure that it is only on when it is needed.
- Lowering the heating thermostat setting slightly and wearing warmer clothes.
- Keeping doors closed between a cool conservatory and the heated part of house.

Often, **lower cost demand reduction measures** are also those that pose the least threat to the heritage value of the property. Examples include:

- insulation to roof spaces and suspended floors;
- flue dampers to open fireplaces - (closed in winter, open in summer);
- thermally lined curtains, blinds and window shutters;
- energy efficient lighting and appliances;
- draught-proofing to doors and windows; and
- hot water cylinder jackets and pipe insulation.

As a general rule, low cost demand reduction and passive energy efficiency measures typical of the energy hierarchy tend to also have the best carbon cost-effectiveness. However in some instances, available subsidies and grants (such as the Government's Feed-in Tariff for solar electricity panels) alter the natural order by strengthening the financial case for traditionally higher cost active systems.


The **carbon cost-effectiveness** of a measure is the capital cost of the measure, less the lifetime fuel cost savings, divided by the lifetime carbon dioxide emissions savings). Understanding the carbon cost effectiveness of measures will help you decide which measures to install so as to get the most emissions reduction value for your money. Calculators such as that on www.T-zero.org.uk can help you make these calculations for your house and take into consideration its design and how you use it. The changing costs of both technologies and fuel costs means that the conclusions will vary over time.

The table overleaf provides an overview of the approximate carbon cost effectiveness of measures. Once you have considered the likely impacts on the heritage significance of your home as set out in Section 2.1 above, the following table will help you to assess the likely costs and benefits of the measures that may be appropriate for your home.

2.3 Implementation

The performance of any measure and its impact on energy efficiency in your property will depend on the quality of the installation and the occupants' behaviour. As with any building project, we recommend that independent professional advice is sought before any works begin. Each energy efficiency measure has its own risks and counter mitigation and these are set out in more detail in the Technical Guidance section, overleaf.

Section 2. Making a low carbon retrofit plan



Carbon cost-effectiveness of retrofit measures

Technology	Capital cost	Carbon Dioxide Emissions Reduction benefit	Subsidy available	Carbon cost effectiveness with subsidy
Solar PV panels	£ £ £ £ £	★ ★ ★ ★ ★	Feed in Tariff	High
Solar thermal panels	£ £ £ £ £	★ ★ ★ ★ ★	Renewable Heat incentive	Medium
Air source heat pumps	£ £ £ £ £	★ ★ ★ ★ ★	Renewable Heat Incentive – in some cases	Low
Biomass heating (stoves and boilers)	£ £ £ £ £	★ ★ ★ ★ ★	Renewable Heat Incentive – in some cases	Low - Medium
Wind turbine	£ £ £ £ £	★ ★ ★ ★ ★	Feed in Tariff	Low
Domestic Combined Heat and Power (CHP)	£ £ £ £ £	★ ★ ★ ★ ★	Feed in Tariff - limited	Low
Solid Wall insulation (Internal/External)	£ £ £ £ £	★ ★ ★ ★ ★	Energy company obligation (ECO)	Medium
Double glazing	£ £ £ £ £	★ ★ ★ ★ ★	Green Deal	Low – medium
Loft insulation	£ £ £ £ £	★ ★ ★ ★ ★	Energy Company Obligation	High
Floor insulation	£ £ £ £ £	★ ★ ★ ★ ★	Green Deal	Medium - high
Condensing boiler	£ £ £ £ £	★ ★ ★ ★ ★	Green Deal	Low - medium
Draught-proofing	£ £ £ £ £	★ ★ ★ ★ ★	No (but practical assistance may be available from local Transition initiatives)	High
Other minor measures	£ £ £ £ £	★ ★ ★ ★ ★	Varies	High

Section 3. Seeking Planning Permission



This section provides guidance on how energy efficiency related developments are dealt with under the planning system and where in the conservation area the various energy efficiency and renewable energy measures may be granted planning permission.

This section is divided into two sub-sections, 3.1 What requires planning permission and 3.2 Planning Guidance.

3.1 What requires planning permission?

Energy Efficiency Measure	Is planning permission needed?	Comments
External Wall Insulation	YES	
Internal Wall Insulation	NO	
Window repair/ draught proofing	NO	
Secondary glazing	NO	
Double Glazing	<p>Dwellinghouse - NO, if it complies with the following condition:</p> <ul style="list-style-type: none"> materials of new windows are to be of similar appearance to the existing ones <p>Flats - YES</p>	<p>UPVC or aluminium are not considered to be of a similar appearance to timber.</p> <p>If your works do not comply with the conditions then planning permission is required.</p>
Porch	<p>Dwellinghouse – NO, if it complies with the following condition:</p> <ul style="list-style-type: none"> the ground area (measured externally) of the structure would exceed 3 square metres; any part of the structure would be more than 3 metres above ground level; or any part of the structure would be within 2 metres of any boundary of the curtilage of the dwellinghouse with a highway. <p>Flats- YES</p>	<p>If your works do not comply with the conditions then planning permission is required.</p>

Section 3. Seeking Planning Permission



<p>Adding a door to an existing porch</p>	<p>NO, if it complies with the following conditions:</p> <ul style="list-style-type: none"> the materials shall be of a similar appearance to those used in the construction of the exterior of the existing dwellinghouse; <p>Flats - YES</p>	<p>If your works do not comply with the conditions then planning permission is required.</p>
<p>Mechanical ventilation with heat recovery (MVHR)</p>	<p>NO</p>	
<p>Solar panels PV & hot water</p> <p>Attached to a building (main or one in curtilage, for example on a garden shed)</p>	<p>NO, if it complies with the following conditions:</p> <ul style="list-style-type: none"> It is not on a main or side wall where visible from the highway It does not protrude more than 200mm from the roof slope or wall It is no higher than the roof line (excluding chimney) It is sited, so far as practicable, to minimise its effect on the external appearance of the building and the amenity of the area Solar panels no longer needed for microgeneration shall be removed as soon as reasonably practicable. 	<p>If your works do not comply with the conditions then planning permission is required.</p>
<p>Solar panels PV & hot water</p> <p>Free standing (for example in a garden)</p>	<p>NO, if it complies with the following conditions:</p> <ul style="list-style-type: none"> No more than one panel/array No higher than 4m above ground level Not visible from the highway Not within 5m of the property boundary Area of panels not to exceed 9m² Any single dimension of an array not to exceed 3m 	<p>If your works do not comply with the conditions then planning permission is required.</p>

Section 3. Seeking Planning Permission



Air source heat pumps	YES	
Ground source heat pumps (Vertical and horizontal)	NO	
Biomass heating system, including wood-burning stoves Combined heat and power system	NO, if it complies with the following conditions: - Flue not to exceed highest part of the roof by more than 1m - boiler/stove is to be an 'exempt' appliance or authorised fuels are to be burnt, as required by the Clean Air Act	A list of 'exempt' appliance and authorised fuels can be found on the smoke control section on the DEFRA web-site If your works do not comply with the conditions then planning permission is required.

To find out whether planning permission is required for other works please visit www.planningportal.org.uk or www.camden.gov.uk.

This guidance relates only to unlisted buildings. If your home is listed all of the measure mentioned above (except freestanding solar panels) will also require listed building consent. Further advice may be sought from the planning department.

Section 3. Seeking Planning Permission



3.2 Planning Guidance

When considering planning applications for works to homes in conservation areas, the Council will consider the impact of the proposal on the heritage significance of the building and area and any harm to it will be weighed against the public benefits of the proposal.



The heritage significance of the building and area

The heritage significance of the buildings, spaces and views which together make up the valued character and appearance of Dartmouth Park Conservation Area is set out in the Dartmouth Park Conservation Area Conservation Area Appraisal and Management Strategy (2009). This sets out what is special about the area and gives guidance as to how this should be preserved or enhanced.

Far from being uniform, the conservation area contains an extensive range of varied house types and decorative details which employ a variety of materials and styles. These are, however, used with a consistency of approach within distinct sub-areas which produces a series of harmonious groups, bound together by the use of common elements such as fair faced brickwork, decorative elevational detailing such as rendered bays, quoins, and cornices, and timber door and window joinery. The roofscape of much of the area is unusually prominent due to the hilly topography which affords expansive views from the higher ground. The layout of streets and plots allows views across back gardens to the rear elevations which also contribute to the character and appearance of the area.

The impact of the proposal on the heritage significance

The impacts of energy efficiency measures on the heritage significance of the building or area can be visual and/or physical.

The extent of visual impact revolves around how far from the existing palette of materials and detailing the proposal goes, and the extent to which it is visible. It is important therefore to consider the design, materials and siting of measures carefully so as to minimise this impact.

The physical impact will vary depending on the measure and how it is installed. Some measures may require the removal of historic fabric (e.g. historic joinery, roof slates, lime plaster) or may have a detrimental impact on fabric if not installed with due care (all internal insulation must be designed to allow the passage of air and moisture through the building to prevent condensation and rot of timbers, for instance).

These impacts may be possible to reverse at some point in the future (e.g. the removal of solar panels from roofs at the end of their lifespan) or permanent (such as the application of external solid wall insulation). Reversible measures may have significant visual impact in the short to medium term, but they leave open the opportunity to amend this in the event of future technological or design advances. Permanent measures cause irreversible change to the fabric and/or appearance of the building so it is essential that these are very carefully designed and installed.

Public benefit

Energy efficiency measures or renewable energy technologies may generally be said to benefit the wider public by virtue of the contribution that they make to the reduction of carbon dioxide emissions and minimising the risks of climate change. Measures will vary in their contribution to reducing carbon dioxide emissions depending on their materials, manufacturing processes, transportation, and effectiveness on site. However, installing measures in the right order is essential if the greatest emissions reduction is to be achieved: installing a highly efficient new boiler will only result in emissions reductions if the heat it produces is retained, so the house needs to be draughtproofed and insulated first.

Section 3. Seeking Planning Permission



The order in which to install measures is set out in Section 2.2 – Design stage.

When considering applications for measures higher up the energy hierarchy, and weighing their public benefit against any harm to the heritage significance, the Council would therefore expect measures lower down the energy hierarchy to have already been carried out.

Energy Efficiency Measures

The following guidance looks in detail at those energy efficiency measures which do require planning permission in some circumstances. See table in section 3.1 for clarification as to whether your measure requires planning permission. The guidance covers the following measures:

- 3.2.7 External solid wall insulation
- 3.2.8 Windows
- 3.2.9 Porches, draught lobbies and front doors
- 3.2.10 Solar PV (Electricity generation) and Solar Thermal (Hot water) mounted on a building
- 3.2.11 Air source heat pumps
- 3.2.12 Biomass heating systems

Some external measures may be acceptable in one location but not in another, depending on the visibility, the nature of the building, its orientation and the design of the measure itself. As each house will have different constraints and relationships with its neighbours this guidance cannot be definitive but we intend it to be an initial indicator of likely acceptability to help you consider your options.

This guidance relates only to unlisted buildings. If your home is listed all of the measures discussed (except for freestanding solar panels) will also require listed building consent. Further advice may be sought from the planning department (see contact details in Appendices).

Section 3. Seeking Planning Permission



3.2.1 External solid wall insulation



External solid wall insulation (ESWI) can change the appearance of the area by covering up traditional brickwork and obscuring decorative details in the architecture.

It needs planning permission in a conservation area and:

- It will rarely be acceptable on the **front** elevation of a building unless render already exists as part of the building's original design. In these cases it may be acceptable on flat fronted properties without architectural decoration and only if it is applied to the whole group. Where projecting bays exist it may be acceptable where these have no architectural decoration, and again only if applied to the whole group.
- It may be acceptable on the **side** elevation of a building depending on the prominence of this elevation and the presence of architectural features.
 - › On semi detached villas it should be set well back from the front elevation and where an expressed chimney stack exists, be located to the rear of this feature. It should not conflict or obscure any architectural decoration (e.g. quoins, eaves brackets or dentil cornices). The extent of set back should be designed in response to architectural features such as windows, doors and services and be located to minimise the extent of visibility in oblique views along the street. The extent of set back may vary, therefore, depending on the size of gap between the houses.
 - › A greater extent may be acceptable at basement level if this is obscured from view from the street.
 - › On side elevations that have architectural features such as quoins, decorative brickwork, several windows and doors or overhanging eaves with a decorative eaves treatment, it may not be feasible or acceptable.
 - › Where the side elevation is highly visible from the public realm, for instance on end houses in a street, or where houses are set at an angle

to the road, it is unlikely to be acceptable.

- › Where it overhangs a pavement you will also require a permanent overhang licence. Contact Camden on 020 7974 4444, or see www.camden.gov.uk/buildinglicences
- It is likely to be acceptable on the **rears** of properties where these are not highly visible from the street and are not part of a prominent or decorative architectural composition.
 - › Many rear elevations are visible from the street due to long views along the rear of terraces and an approach which preserves these views will be expected. This will usually mean that external insulation to the garden level will be acceptable, but not upper storeys.
 - › External insulation on all elevations of smaller rear extensions (e.g. part width single storey or two storey extensions on 4 storey properties) that are clearly subordinate to the main building are likely to be acceptable.
 - › On properties with high or wide rear extensions that form a large part of the rear elevation, external insulation above garden level on any rear elevation is unlikely to be acceptable.

Render finishes should match the colour and texture of the prevailing brickwork, and/or the predominant existing render colour, where it exists. Other finishes will be considered on a case by case basis taking the context and their specification into account.

You are reminded that total coverage of the external walls, either with external or internal wall insulation, is recommended to avoid leaving colder areas that may attract damp and mould growth.

Where new rainwater goods are required these should be of black painted metalwork.

The following table indicates where in the conservation area external insulation might be considered acceptable. You are advised to use this as an initial guide and then consider the broad guidance above. It should not be treated as a guarantee that planning permission will be granted in these locations however as the individual circumstances of each application will need to be assessed.

Section 3. Seeking Planning Permission



External Solid Wall Insulation – locations in the Dartmouth Park Conservation Area where planning permission may be granted permission

Street	Front	Side	Rear
Baltimore Street	Yes if done as a group 5-39 & 10-34, to lower ground floor only	No	Yes - Garden level and rear extensions only
Bertram Street	No	No	Yes - Garden level of elevation and of rear extensions only
Boscastle Street	No	Yes (except on exposed street -corner elevations)	Yes East side of road – garden level elevation only West side of road – rear extensions and garden level elevation of main house
Bramshill Gardens	No	The variety of building types in this road means it is not possible to give general guidance. Rear EWI is likely to be acceptable at garden level on most properties, and further areas at the rear or side may also be possible on some properties. <i>Please seek further advice from the planning department.</i>	
Brookfield Park	No	Yes	Yes
Chester Road	No	The variety of form, materials and visibility of side and rear elevations in this road means it is not possible to give general guidance. Please seek further advice from the planning department	
Chetwynd Road (east)	66-80 (even) if done as a group in location of existing stucco and decorative panel retained.	Yes	Yes – garden level elevation and rear extensions except where visible from street.
Chetwynd Road (west)	No	Yes – 1; 56 & 62 at ground floor level only; No - 2,4,61,54	Yes - Chetwynd Villas Yes – garden level and rear extensions except where visible from the street.

Section 3. Seeking Planning Permission



External Solid Wall Insulation – locations in the Dartmouth Park Conservation Area where planning permission may be granted permission

Street	Front	Side	Rear
Churchill Road	Yes – where stucco currently exists and if done as a group	Yes	Garden level elevation and rear extensions
College Lane	No	No	Yes - garden level elevation and rear extensions
Colva Walk	Yes	Yes	Yes
Croftdown Road	No	No (except exposed flanks of Regency Lawn)	15-47 garden level elevation and inner flanks of rear extensions
Dartmouth Park Avenue	No	Yes – 4-26 (even) and 3-33 (odd)	2-26 (even) garden level <i>Elsewhere check with planning department due to varying extent of visibility of rear elevations from Croftdown Road.</i>
Dartmouth Park Hill	Yes 59-73 (odd) No - Elsewhere	Yes - 59 – 79 (odd) (except north elevation of 79) <i>Elsewhere check with planning department due to variation in building form, materials and design.</i>	Yes - garden level elevation only
Dartmouth Park Road (east)	No	Yes No - 68-70 (even)	Yes - garden level elevation only
Dartmouth Park Road (west)	No	Lower ground level only	Yes - garden level elevation and rear extensions (except where flank faces road)
Doynton Street	Yes Basement and ground floor elevations of nos 7-35 (odd) if done as a group.	Ground level only - 7	Yes - basement and ground floor elevation, and rear extensions of 9-35 (odd)
Glenhurst Avenue	No (Yes – Ravenswood)	Yes -1&2 No – 23 &46	Yes - full height elevation and rear extension.

Section 3. Seeking Planning Permission



External Solid Wall Insulation – locations in the Dartmouth Park Conservation Area where planning permission may be granted permission

Street	Front	Side	Rear
Gordon House Road	No	Yes - 20 No – 1	Yes, full rear elevation & extensions
Grove Terrace		Buildings in Grove Terrace are listed and so detailed advice should be sought from the Planning Department	
Highgate Road	The variety of building types in this road means it is not possible to give general guidance. Rear ESWI is likely to be acceptable at garden level on most properties, and further areas at the rear or side may also be possible on some properties. Please seek further advice from the planning department.		
Highgate West Hill	No	No	Nos 1-4 (consec) garden level elevation only
Kingswear Road	No	No	May be possible on ground floor elevation
Lady Somerset Road	No	Yes (ground floor elevation only)	Ground floor elevation only
Laurier Road (upper)	No (except no.32)	Yes No - 23, 27, 32a, 34, 36, 38, 42, 45 & 46.	Yes - South side rear extensions & ground floor elevations where not visible from the street North side – ground floor elevations only.
Laurier Road (lower)	No (except 1b & 1c if brick clad to match)	Yes No – 1c, 2, 21, 30	Garden level elevation only

Section 3. Seeking Planning Permission



External Solid Wall Insulation – locations in the Dartmouth Park Conservation Area where planning permission may be granted permission

Street	Front	Side	Rear
Lissenden Gardens	No	Yes	The blocks have different configurations to the rear and so it is not possible to give general guidance. Some locations may be feasible and acceptable- contact the planning department for further advice.
Little Green Street	Buildings in Little Green Street are listed and so detailed advice should be sought from the Planning Department		
Lulot Gardens	Yes	Yes	Yes
Mortimer Terrace	Ground floor elevation only 1-11 (consec) No – 13-16 (consec)	Yes – nos.13 – 16 (consec) Ground floor elevation only 1-11 (consec)	Yes, full height 1-11 & 13-16 (consec).
Raydon Street	Yes	Yes	Yes
Retcar Place	Yes	Yes	Yes
St Albans Road	No	Yes 2-34 (even), 25-33 (odd), & St Alban's Villas	Yes – 2-34 (even), 25-33 (odd) full height elevations, & St Albans Villa's
St Anne's Close	No	Yes	Yes
Sandstone Place		Yes	Yes
Spencer Rise	No	Yes- 2 (ground floor only), 50-90. No - 48 & 67	Ground floor elevations and rear extensions , full elevation on 50-90
Stoneleigh Terrace	Yes	Yes	Yes

Section 3. Seeking Planning Permission



External Solid Wall Insulation – locations in the Dartmouth Park Conservation Area where planning permission may be granted permission

Street	Front	Side	Rear
Swains Lane	No	Yes	Yes full height
Twisden Road	No	Yes – 14, 16, 74, & 25-35 No – 1 & 51	Yes - Garden level elevation and rear extensions, full elevation on 25-35. No – upper levels where visible from the public realm.
Weslyan Place	No - 4-7 (consec)	Yes – no. 6	Yes full height elevation and rear extensions of 4-7 (consec)
	Nos 1a, 1, 2 & 3 Wesleyan Place are listed buildings and so detailed advice should be sought from the Planning Department		
Winscombe Street	Yes - Basement level nos 1-15	No	Garden level only
Woodsome Road	Yes – 70-86 & 25-31.	Yes 70-86 & 25-31. No – 1b, 23, 30, 32, 57	Yes - Garden level elevation and rear extensions (except where adjacent to street) Yes – 70-86 & 25-31.
York Rise	Yes- 2a, 2b, 2c; 16-18 if brick clad; 39. No – 6-14, 20-24, 36-50 (even); 21-27 (odd)	Yes - 26-34 No – 21, 24, 31, 33-37 (odd), 50	Yes 26-34.

Section 3. Seeking Planning Permission



3.2.2 Windows

The houses in Dartmouth Park Conservation Area were mostly built with timber vertically sliding sash windows with a simple glazing pattern of either one pane over one, or two panes over two. The timber was slow-grown softwood which was much stronger than the faster-grown softwoods available today, and can have an indefinite lifespan if kept regularly painted. Localised repairs can be made and they can be renovated to ensure they close tightly and cut out draughts. They

can also be supplemented by secondary glazing – but ensure that this doesn't prevent you from using timber shutters if these exist. These works do not need planning permission.

Planning permission is required to replace an existing window with one of different materials or appearance. Use of uPVC in the conservation area will be resisted.

Drawbacks of using uPVC windows and alternatives

- uPVC (unplasticised polyvinyl chloride) is a non-bio-degradable material that is made from non-renewable petroleum resources.
- The production and disposal (via landfill or incineration) of uPVC windows leads to the release of harmful industrial pollutants (i.e. dioxins, furans, lead, cadmium mercury and organic tin compounds)
- uPVC windows degrade over time and require regular cleaning and maintenance if they are to remain in good condition.
- uPVC windows are very difficult to repair, unlike timber frames
- Based on an analysis of the environmental impact of using different materials for window frames, Greenspec recommend avoiding uPVC and using Forestry Stewardship Council (FSC) durable temperate hardwood instead,

- followed by, in declining order of preference, FSC temperate softwood clad with aluminium (preferably recycled), FSC temperate softwood treated with plant based paint, or certified softwood painted with low VOC paint.

www.greenpeace.org.uk/files/pdfs/migrated/MultimediaFiles/Live/FullReport/5588.pdf; www.greenspec.co.uk/html/materials/windowframes.html

Where they are proposed for replacement with double glazing the appearance of the new window should exactly match the original. This can be done by retaining the existing frame and having new double glazed units inserted into it, or by having new double glazed sashes made up. Important features to match are the width of the glazing bars; that the glazing bars are integral features of the joinery and not 'stuck on'; the height of the meeting rail; and the presence or absence of 'horns' on the top sash. Some windows have historic coloured glass and this should be retained and re-used. Heavier sash weights may be needed (these are hidden in the sash boxes on either side of the window) to counterbalance the extra weight of the double glazing; new alternatives to traditional sash weights are spiral or spring balanced windows, which are also acceptable in the conservation area.

A small number of dwellings in the conservation area have windows with multi-paned sashes (for instance the west side of Brookfield Park, the west end of Croftdown Road and the mansion flats on Croftdown Road). These are rarely possible to replicate accurately in double glazing and in these cases secondary glazing should be used instead.



Other areas of the conservation area have timber side hung casements (for instance the cottage estate on Croftdown Road and Kingswear Road, the east side of Brookfield Park and some houses on St Albans Road). These have either a single pane in each casement, or are multi-paned. The same approach applies here – single panes can be satisfactorily replaced by double glazing, but multi-panes may be more difficult to achieve an acceptable match. Where this is the case secondary glazing should be used instead.

Section 3. Seeking Planning Permission



3.2.3 Porches, draught lobbies and front doors



Heat is also lost through external doors and this can be reduced by thermally upgrading your existing external doors, replacing them with more efficient modern doors or adding a draught lobby inside the front door. These measures do not require planning permission.

In a small number of cases in the conservation area the front door sits within an open porch or is recessed from the building frontage and an external draught lobby has been created in some cases by the addition of a screen including an external door. This may require planning permission depending on the materials and design of the proposal, so you are advised to contact the planning department for confirmation if you wish to carry this out. Where this is

being proposed it is important that the design and materials respond sensitively to the existing design of the building so as to preserve its appearance. For it to be functionally energy efficient the space inside the lobby must be large enough to allow one door to be closed before the other is opened to reduce heat loss.

3.2.4 Solar PV (Electricity generation) and Solar Thermal (Hot water) mounted on a building



Provided that solar pv or thermal installation meet a number of conditions about their siting and visibility they do not need planning permission. See Section 3.1 -What requires planning permission, above for full details of the conditions.

The Council will require them to be located, where possible, where they will not be highly visible from the public realm,

and to be flush with the plane of the roof so as to preserve the views of the roofscapes that are visible across the conservation area. However, it may be permitted development for you to locate a panel in such a location, depending on the individual circumstances of your house. If you are not sure whether your proposed installation meets the requirements and conditions stated above we would strongly advise you to use our duty planner and pre-application advice service and then apply for a Certificate of Lawful Development from the planning department.

In Dartmouth Park Conservation Area there are a variety of roof types which offer different opportunities for the erection of solar pv or solar thermal panels and these differ in the extent to which they are visible from the public realm.

- Valley roofs that are set behind a front parapet wall. These occur predominantly in Bertram Street, Spencer Rise, Winscombe Street and parts of Boscastle, Chester, Churchill and Chetwynd Roads. Solar panels can be set within the roof valley without being visible from the street.
- Flat roofs. These exist predominantly in the blocks of the Whittington Estate, Regency Lawn on Croftdown Road, parts of St Albans Road, Swains Lane and Wesleyan Place. These offer significant opportunities for siting solar panels that are not visible from the public realm.
- Mansards or pitched roofs incorporating areas of flat roof. These exist predominantly in Dartmouth Park Avenue, Gordon House Road, Laurier Road, Lissenden Gardens, parts of Boscastle Road and the north side of Croftdown Road, and the flat sections offer opportunities for siting solar panels with minimal visibility from the public realm.
- Roofs with a single pitch to front and rear. These exist predominantly on Balmore Street, Chester Road, Chetwynd Road, College Lane, the cottage estate and mansion blocks on Croftdown Road, Dartmouth Park Hill, Doynton Street, Twisden Road, Woodsome Road, York Rise estate and, the east side of Brookfield Park, parts of Bramshill Gardens and south side of Raydon Street, Suitability for solar panels and their visibility will vary greatly depending on the orientation of the street.

Section 3. Seeking Planning Permission



- Roofs with a single pitch to front, side and rear. These exist predominantly on the detached and semi detached houses on Dartmouth Park Avenue, Dartmouth Park Road, and parts of Laurier Road. Suitability for solar panels and their visibility will vary greatly depending on the orientation of the street.

An alternative approach is solar slates or tiles, which replace the existing roof slates or tiles and closely match their appearance, thereby lessening any visual impact on the appearance of the conservation area. Solar slates are twice the price of solar panels (2012) but are expected to fall to meet the price of solar panels by 2020. Planning permission is not required for solar slates or tiles.



3.2.5 Air source heat pumps

Air source heat pumps need to be situated where they will get a sufficient flow of air and the optimum location is likely to be freestanding in a rear garden. You are advised to consider the location and colour of the unit so that it blends in with a garden setting and so that the visual impact is minimised. A noise impact statement will be required with a planning application for an air source heat pump.



3.2.6 Biomass heating systems

New or altered flues and chimneys may be highly visible in the conservation area due to the views of the roofscape that the sloping land allows. Where possible existing chimneys should be used. New flues should not be located on the principal or side elevations if they would be visible from the street, and they should be constructed of materials to match the existing construction.



An air quality assessment is required with a planning application for a biomass installation to demonstrate 'negligible impacts on air quality. The impacts on neighbouring amenity space may also be considered on environmental health grounds.



Section 4. Technical guidance on energy efficiency measures

This section gives advice on a range of technical energy efficiency measures that may be applicable to homeowners in Dartmouth Park Conservation Area.

In this guide we can only provide a brief summary of each improvement measure, but more information can be obtained via the references and links in the appendices, in particular the Institute for Sustainability's Low Carbon Domestic Retrofit Guides (Rickaby et al, 2011).

The measures are as follows:

Insulation

- 4.2 Windows, external doors and draught lobbies
- 4.3 Air-tightness
- 4.4 Ventilation
- 4.5 Heating and hot water systems, including solar hot water and biomass
- 4.6 Photovoltaic electricity generation
- 4.7 Heat pumps
- 4.8 Domestic combined heat and power

4.1 Insulation

Roof Insulation

Dartmouth Park Conservation Area contains a wide variety of roof forms, including mansards, single pitched, pitched and hipped, central valley roofs, and flat roofs. The following section gives advice for the two generic roof forms – pitched and flat. The advice can be adapted to suit the variations that exist in the conservation area.

Insulation of pitched roofs between the ceiling joists



- Initial Assessment
- Loft insulation can be installed without causing visual impact on the building or conservation area.
- Loft insulation is inexpensive, and may be installed at reduced cost by an energy company.
- Loft insulation is also easy to install on a DIY basis.

Design Stage

- Any existing insulation may be in poor repair, and may have to be removed before the new insulation is installed.
- If loose fill insulation is present, and the composition is not clear, seek expert advice.
- Lofts must be cleared of stored property before they are insulated and boarding may be required above the insulation to allow property to be re-stored and people to walk around safely.
- Ventilation must be provided to prevent condensation and rot. Eaves ventilators must not be blocked by new insulation; if no ventilators are present they should be installed.



Section 4. Technical guidance on energy efficiency measures

- Insulation must not be placed over electrical wiring or recessed ceiling lights; wiring should be relocated above the insulation to avoid the risk of overheating; thermal hoods may be required for recessed ceiling lights
- Cold water storage tanks located in lofts may have to be insulated

Implementation

- One layer of insulation should be laid between the ceiling joists (to the full depth of the joists), and another layer should be laid across the ceiling joists (at right angles to them); the total insulation thickness should be at least 300 mm.
- Insulation must not block bathroom or toilet extract ventilation ducts; if such ducts terminate in the roofspace they must be extended through the roof itself.
- In the case of valley roofs, ensure that insulation is continuous beneath the valley, between the two loft spaces, in order to avoid thermal bridging.
- It is essential that cold lofts above insulated ceilings are ventilated, in order to reduce the risk of condensation and rot on the cold underside of the roof;

Insulation of pitched roofs at the rafters




Initial Assessment and Design

- Planning permission is required if the height of the roof ridge is to be raised, and may not be granted if the house is semi detached or part of terrace where the roof is visible in views from the public realm.
- The position of the insulation will depend on the amount of work being done to the roof. If the roof covering is replaced, insulation may be placed between and/or over the rafters before re-covering. If the roof covering is not replaced, insulation must be placed between and/or under the rafters before any new linings are fixed.

replaced, insulation may be placed between and/or over the rafters before re-covering. If the roof covering is not replaced, insulation must be placed between and/or under the rafters before any new linings are fixed.

- This method of insulating creates a 'warm' loft space (i.e. the loft is within the insulated envelope) and potentially an attic room if this doesn't already exist.
- Insulation fixed to the undersides of rafters will reduce headroom.
- Existing plasterboard linings in attic rooms and loft conversions may have to be removed, and subsequently replaced.
- It is often difficult to insulate all the way down to the eaves and valleys, because they are inaccessible.

Implementation

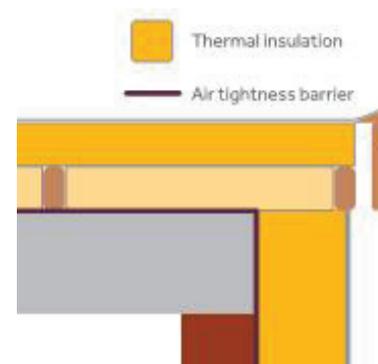

- The roof insulation should connect to the wall insulation at the eaves and verges, if possible; exposed gable walls should be insulated (see Solid Wall Insulation, below).
- A vapour barrier should be included on the warmer side of the insulation (behind any linings) in order to prevent warm moist air penetrating into the construction and the consequent risk of condensation and rot.

- In the case of valley roofs, ensure that insulation is continuous beneath the valley between the two pitches.

Flat roofs

Initial Assessment and Design

- The easiest way to insulate an existing flat roof is when the whole roof is being renewed. Insulation can be placed on top of the existing joists, with the weatherproof covering applied on top of the insulation, creating a 'warm roof' construction. The type of insulation depends on the choice of weatherproofing.
- If the whole roof is not being renewed the insulation must be installed from



Section 4. Technical guidance on energy efficiency measures

the underside of the roof (this is known as a 'cold roof'). The finish to the ceiling below must be removed and insulation fitted between the joists.

- Older flat roofs (built in the 1960s and 70s) may have been constructed with asbestos-based cement boards. If your roof dates from this period seek specialist advice.

Implementation

- In cold roof construction, where the insulation is between the joists, there must be a ventilated cavity above the insulation (between or above the joists), and a vapour barrier below it, to reduce the risk of warm moist internal air penetrating to the underside of the cold roof deck, causing condensation and rot. To reduce thermal bridging by the joists a layer of insulation should be added to the underside of the rafters before the ceilings are re-instated.

Floor insulation

- Most houses and extensions built before the 1950s in Dartmouth Park Conservation Area have suspended timber floors. Houses built after this date and flats in blocks are more likely to have solid concrete floors.
- Suspended floors are usually very poor thermally, constructed of timber joists spanning between load-bearing walls and supporting timber floorboards. They are notoriously leaky and cold but, unlike concrete floors, are relatively easy to upgrade.
- Solid floors are usually constructed of concrete, which might bear directly on to the ground or be supported via concrete beams with infill blocks. It is common practice to top the structural layer with a cement screed.
- Insulating the ground floor is one of the most disruptive of all retrofit

measures, often requiring temporary removal of all internal fittings, furniture and finishes from the area being insulated.

Timber floors

Initial Assessment and Design



- Timber floors should be checked for structural soundness and the presence of wet or dry rot before proceeding to fit any insulation.
- When insulating suspended floors, it is important to maintain the ventilation under the floor void, in order to avoid condensation and the risk of rot. The void should be cross-ventilated via vents in the external walls.

- When insulating timber floors, a Building Control Officer should be consulted to ensure that the correct fire performance is achieved.

Implementation

- Timber floorboards can be lifted and insulation fitted between the joists. The most common technique is to use mineral fibre supported on plastic netting; rigid insulation can also be wedged or cut to fit tightly between the joists (although this is less reliable) or supported on timber battens fixed to the joists. It is important to completely fill the space between the joists, above the netting and beneath the floorboards.
- With old square-edged floorboards, laying hardboard over the whole floor will eliminate draughts from between the boards. The hardboard should be taped at the joints and sealed at the edges. Alternatively the gaps can be sealed with a sealant. Gaps and holes where pipes or cables rise from below should be sealed with tightly-packed mineral fibre or expanding foam.



Section 4. Technical guidance on energy efficiency measures

- Air tightness measures should be applied. An air-tightness membrane under the boards, sealed to the walls or skirting boards, is recommended.

Concrete floors



- If solid floors are to be taken up and re-laid then there is an opportunity to add insulation to the new concrete floor slab. The construction is the same as a new-build floor. Insulation can be added above or below the slab.
- If solid floors are not taken up then the only way to add insulation is to lay it on top of the existing floor. This can cause problems with room heights, door thresholds and at the bottom of the stairs.

Solid wall insulation

Dartmouth Park Conservation Area is largely typified by houses with solid brick external walls, without a cavity. There are two options for insulating solid walls: external or internal insulation. Technically, it is always preferable to insulate externally, but this is not always possible. (Some houses in the conservation area that were built after 1935 will be of cavity walled construction, with or without insulation in the cavity).

External Wall Insulation



Insulation is fixed to the outside of the wall, and then covered by a protective finish, which can be render or another form of cladding such as 'brick slips' (i.e. thin brick tiles) or timber cladding. Some render finishes can also be given a brick-like appearance. These finishes may be more acceptable in some locations in the conservation area but are more expensive: brick slips cost approximately twice that of plain render, and render finished to look like brickwork costs approximately two-thirds more than plain render.

Initial Assessment and Design

- Planning permission will always be required in conservation areas.
- External wall insulation can dramatically reduce heat loss from the house and occupants may usually remain in the house while the work is carried out
- It is very compatible with window replacement, and it is often appropriate to install both measures at the same time.
- The layer of insulation is continuous (except across windows and doors), reducing thermal bridging and cold spots, and helping to improve air tightness.
- There is a choice of finishes that may be used to respond sensitively to the architectural context: render (in various colours and textures, including a finish that looks like brickwork); brick slips (clay tile with the surface dimensions of a traditional brick that are applied to the outer surface of the insulation to look like brickwork), or timber weather board cladding.
- External insulation may not be acceptable on all elevations, or to the full height or width of any elevation for planning reasons (See Planning Guidance in Section 3) and should in these situations be combined with internal wall insulation
- External fittings such as rainwater pipes, power and telephone cables and satellite dishes will have to be removed and re-fixed after the insulation has been installed.
- The eaves and/or verge overhang of the roof may have to be extended.
- Windows cills have to be extended, internally or externally (depending on the position of the windows).
- Some external doors may have to be repositioned, especially those located against internal corners.
- A party wall agreement is likely to be required where one house applies external wall insulation that ends at a party wall.



Section 4. Technical guidance on energy efficiency measures

- Application of ESWI to only one property in a terrace is likely to benefit your immediate neighbours as the higher level of conserved heat will pass through the party wall to the adjoining dwelling. However it also carries a risk of condensation and mould growth in the relatively cold internal corners of the adjoining dwelling's external walls.

Implementation

- The existing wall surface may need a parge coat of thin render, to smooth the surface before the insulation is fixed.
- Windows should ideally be repositioned within the insulation layer, as this creates a continuous upgraded external surface. It will also maintain the same set-back distance from the wall surface as the original windows, preserving the traditional appearance. If this is not done any exposed reveals of the window openings must be insulated with a thin, high-performance insulation board to reduce thermal bridging.
- If the external wall insulation does not extend to the full height or width of the elevation, it is necessary to use proprietary details to seal the edges of the insulation so that cold external air (and water) cannot penetrate behind it.

Internal Wall Insulation



Insulation is fixed to the inside of the wall, and then covered by a plasterboard lining. The installation must also include a vapour barrier and/or air-tightness membrane; sometimes a ventilated space (on the cold side of the insulation) and a wiring void (on the warm side of the insulation and air barrier) are also included.

Initial Assessment and Design

- The external appearance of the building is not affected.
- A wide variety of insulation materials of different thicknesses is available, including mineral wool, sheep's wool, wood fibre boards and rigid plastic insulation boards.
- Individual rooms may need to be cleared while the work is carried out.
- To achieve the optimum heat loss reduction there may be a loss of room space of up to 150 mm adjacent to external walls.
- Depending on the thickness of insulation used many internal fixtures and fittings, including skirtings, architraves, ceiling coving, power points and switches, radiators, shelving, fitted wardrobes, etc, may have to be removed and subsequently replaced. Some fittings may require adapting to fit after the insulation has been installed.
- Existing kitchen and bathroom fittings will need removing and may need adapting to fit against the insulated walls.
- Redecoration is required after the insulated linings have been installed.
- Once insulated, masonry walls will be colder than previously, and will not dry out as quickly after rain. The ends of timber floor and ceiling joists that pass through the insulated linings and are built into cold masonry walls may become wet, and rot. The cold external surface of very exposed walls may attract algae growth. In freezing weather, water that penetrates into cracks



Section 4. Technical guidance on energy efficiency measures

and crevices in very exposed walls may freeze (and not be melted by heat loss), resulting in spalling of brickwork. These risks can be mitigated to some extent by the use of anti-fungal and waterproofing treatments.

- Re-pointing of Victorian brickwork should always be in lime mortar as this provides a 'path of least resistance' to any moisture in the brickwork, and allows the brickwork to dry out more readily. Hard cement mortar should never be used on historic brickwork as it forces water to move through the bricks and can cause cracking and spalling.

Implementation

- Unless the insulated linings include a very carefully installed continuous vapour barrier that is sealed at all joints, edges and service penetrations, there is a significant risk of interstitial condensation and rot when warm moist internal air penetrates to the cold internal surface of the original masonry wall.
- An alternative method of reducing the risk of interstitial condensation behind the insulated linings is to space the linings at least 25 mm away from the walls and ventilate the resulting cavities with external air.
- Insulated linings should be returned at least 600 mm down party walls and masonry internal partitions, where they meet external walls, in order to reduce thermal bridging and the consequent risk of condensation and mould growth.
- The exposed reveals of window and door openings should be insulated with thin, high performance insulation board, to reduce thermal bridging and the consequent risk of condensation and mould growth.
- It may be possible to insulate the backs of shutter boxes with thin layers of very high performance insulation such as aerogel board.
- Services (e.g. radiators, power points and switches) should be relocated off external walls to avoid penetration of the vapour barrier by pipes and wires. Alternatively, an internal service void can be created behind the plasterboard linings, but inside the vapour barrier and insulation layer, by fixing the plasterboard on timber battens.

- Combining internal and external insulation
- In conservation areas, architectural and planning considerations often result in solutions that involve a combination of internal and external wall insulation on different walls. In such cases it is important to maintain the integrity of the insulation layers, as far as possible, and reduce the risk of creating cold spots, by overlapping the interior and external insulation by at least 600 mm on opposite sides of the wall. Without this overlap there is a significant risk of internal condensation and mould growth in the location of the cold spot.



Section 4. Technical guidance on energy efficiency measures

4.2 Windows, external doors and draught lobbies

Improving windows and doors



Windows and glazed doors account for significant heat loss (up to six times as much as the same area of wall or roof). In Dartmouth Park Conservation Area the appearance of windows and doors contributes much to the area's character and so alterations to them must be done sensitively.

The key measures for improving the energy efficiency of windows are

- draughtproofing (see section 4.3 below),
- adding secondary glazing
- upgrading existing single glazed windows by inserting double glazed panes; and
- replacing existing single glazed windows with double glazed units.

Initial Assessment and Design

- Historic timber windows were made of slow grown softwood which was more durable and resistant to decay than a comparable modern softwood, and if they are regularly painted they can have an indefinite lifespan.
- English Heritage has undertaken research to demonstrate how existing single glazed timber sash windows can be upgraded and their performance improved dramatically by repairing them so they are well fitting, and by using the traditional timber shutters and , heavy curtains or blinds and secondary glazing. They recorded heat loss reductions of up to 41% with heavy curtains, 58% with well fitting shutters and 58% with secondary glazing (see Appendices for reference)

- Existing timber window frames can be retained and have their individual panes replaced by 'slimlite' or similar vacuum double-glazing units, designed to have a narrower gap between the two panes than a complete new replacement so they can fit within the existing window frame. They can have a low emissivity coating on the inner pane and inert gas in the cavity to reduce heat loss. The performance of this approach is measured per pane, rather than per whole window and any panes that are replaced should have centre pane U-values (i.e. U values measured at the centres of the panes, not including the frames) not exceeding 1.2 W/m²K.
- Secondary glazing is the cheapest and least disruptive improvement option for windows after draughtproofing, use of timber shutters and thick, thermally lined curtains. It has the benefit of allowing the historic timber windows to remain in place and in use. It should be draught proofed to minimise the condensation risk between the original window and the secondary glazing. It can be supplied either as a single pane or as a double glazed unit.
- Secondary glazing can be difficult to install where there are internal window shutters that are to remain in use. However, if the secondary glazing is fixed against the back of the existing window frames it is sometimes possible for the shutters to remain in use.
- New double glazed windows and doors. Building Regulations Approved Document L Conservation of fuel and power (2010) provides guidance on the thermal performance of new and replacement windows and external doors. The requirement is specified in terms of maximum thermal transmittances (U values): the higher the number the greater the heat loss. The maximum window U-values shown in the Table overleaf are for the whole of the window unit, including the glazing and the frame. New windows must be draught proofed.



Section 4. Technical guidance on energy efficiency measures

U-values of windows and doors

Fitting	U-value of existing old door or window (W/m ² K)	Building Regulations maximum U-value of new door or window (W/m ² K)
Window or rooflight	Around 3.0	1.6
Doors (glazed or solid)	Around 3.0	1.8

- Existing single-glazed windows and solid timber doors are likely to have U values of around 3.0 W/m²K, i.e. they are responsible for approximately twice as much heat loss as new or replacement ones. The very best performing windows can now achieve exceptional U-values of around 0.75 W/m²K through the use of triple-glazing, gas fill, low-emissivity coatings and insulated frames. Replacement double glazed timber windows that are acceptable in Dartmouth Park Conservation Area are likely to achieve between 1.4W/m²K and 1.8 W/m²K, by using low emissivity coatings and gas fill in the glazing units.

Draught lobbies



A draught lobby can make a small improvement in the thermal performance of a house by reducing heat loss through the front door and reducing the exchange of warm internal air with cold external air when people enter or leave the house.

Initial Assessment and Design

Draught lobbies can be 'inside' (i.e. within the insulated envelope of the house, for instance the front hall) and therefore heated, or 'outside' (i.e. outside the insulation, for instance in an existing porch) and unheated.

Of the two doors that define a draught lobby the one with the better thermal performance (to meet the guidance in Building Regulations Approved Document L – see above) should be the one that aligns with the wall insulation – that is the outer door of an 'inside' lobby, or the inner door of an 'outside' lobby. Both doors should be draughtproofed.

There should be enough space between the two doors to ensure that the outer door can be closed before the inner one is opened, and vice versa.

4.3 Air-tightness

A factor in heat loss from homes is the unintended movement of air through gaps in the building fabric. The aim of air-tightness measures is to reduce the amount of warm air escaping from the building through these gaps.

However, the introduction of fresh air into a building is vital to remove pollutants (e.g. water vapour from cooking, water vapour and carbon dioxide from breathing) and to keep the occupants of the dwelling cool during the summer. Thus a combination of air-tightness (reducing uncontrolled air infiltration, commonly experienced as 'draughts') and deliberate, controlled ventilation is required. This is summed up in the maxim 'Build tight, ventilate right'. Ventilation is dealt with in the next section.

The measure of air tightness of a building envelope is known as its air permeability (which is measured in the volume of air loss per m² of floor area of the home per hour at 50 Pa excess pressure, during a fan pressurisation test). It is always a good idea to get a dwelling pressure tested before and after any significant low carbon retrofit work is carried out, in order to establish an air tightness target. It will rarely be practical to reduce the air permeability to less than half the original value.

Initial Assessment and Design

- Improvements to exposed floors, walls and roofs should always include measures to improve air tightness. However, improved air tightness may result in condensation on windows and other cold surfaces, unless adequate ventilation is also provided. See the Ventilation section below.



Section 4. Technical guidance on energy efficiency measures

- Suspended timber floors can be a source of air leakage to under-floor voids, which are ventilated to the outside. See the section on floor insulation, above.

Implementation

- Exposed wall and roof constructions should include air barriers (which may double as vapour barriers) located on the warmer side of any insulation and with taped joints and edges.
- Where windows and external doors are being retained, ensure that the edges of the frames are sealed to the walls with no gaps and that all openings are draughtproofed. Air infiltration through a sash window in good condition can be reduced by as much as 86% by adding draught proofing.
- Penetration of air barriers by services (wires and pipes) should be avoided. Some proprietary air barrier systems include grommets that allow electrical cables to run through the barrier while maintaining its integrity.
- If possible, include service voids in walls and ceilings, behind the plasterboard linings but on the warmer sides of the air barriers and insulation.

4.4 Ventilation

Traditionally in the UK the 'leakiness' or air permeability of homes has been allowed to contribute, in an uncontrolled way, to their ventilation (i.e. the removal of stale air and provision of fresh air). However, retrofit work often improves air tightness and thus reduces the level of ventilation. Therefore, in accordance with the 'Build tight, ventilate right' maxim deliberate ventilation of retrofitted properties is essential to ensure indoor air quality, remove pollutants and reduce condensation risk. Building Regulations Approved Document F Ventilation provides guidance on minimum acceptable levels of ventilation in dwellings.

There are several options for ventilating a retrofitted property, ranging from intermittent extract fans combined with trickle ventilators to whole-house

ventilation systems with heat recovery. Regardless of the method chosen, the ventilation system must be capable of removing stale, moist air and replacing it with fresh air from outside. Systems with heat recovery have the advantage of recovering heat that would otherwise be lost from the stale exhaust air and transferring it to the fresh supply air.

As a general rule, if the tested air permeability of a home after retrofit work has been carried out is 5 m³/m²h at 50 Pa or higher, then natural or passive stack ventilation (see below) should be adequate. However, if the tested air permeability is less than 5 m³/m²h at 50 Pa then some form of whole-house mechanical ventilation system (again, see below) is likely to be required. In more practical terms, simply insulating an exposed floor, or the roof, or the walls, or draught stripping the windows, is unlikely to improve the air tightness to the point where whole-house ventilation is required. However, doing two or three of these things (and especially combining wall insulation with draught-stripping of windows) may trigger the need for whole-house ventilation. If it is an objective of the retrofit project to achieve a very high standard of air tightness (i.e. air permeability less than 3 m³/m²h at 50 Pa) then whole-house ventilation is likely to be essential.

Intermittent extract fans and trickle ventilators

This is the most basic form of mechanical ventilation. The extract fans are fitted in the 'wet' rooms (bathrooms and kitchens) in order to remove odours and water vapour at source. Fans are usually controlled by light switches, with timed overruns. Fresh air is supplied by trickle ventilators, most commonly installed in the window frames.

The advantage of natural ventilation is that it is inexpensive and easy to fit. However, as the air tightness of a property is improved, reducing uncontrolled air infiltration, the result may be poor air quality, because the fans may not extract enough stale air and/or the trickle vents may not supply enough fresh air.

Initial Assessment and Design

- Fans must exhaust stale air to the exterior, not to a loft or garage.




Section 4. Technical guidance on energy efficiency measures

Implementation

- Energy efficient, low wattage extract fans with DC motors should always be specified.
- Through-the-wall ventilators can be used instead of trickle ventilators, and both can be equipped with humidistat-controlled variable apertures.

Passive Stack Ventilation (PSV)

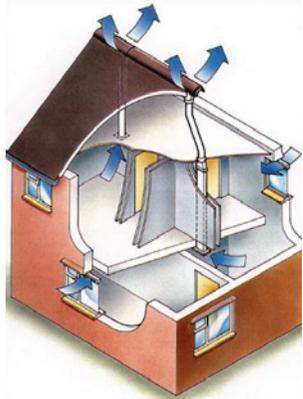

Passive stack ventilation relies on the natural buoyancy of warm air. There are no fans: instead, warm stale air from the bathrooms and kitchen rises through ducts to the ridge of the roof, where it is vented to the outside. Humidity-sensitive trickle vents in the bathrooms and kitchen control the extract rate, and fresh air is supplied by humidity sensitive trickle ventilators in the living area and bedrooms.

Unless a home is undergoing a major retrofit, installing passive stack ventilation can be difficult, because of the need for vertical ducts rising

through the house. Therefore this type of ventilation system is not often retrofitted and is unlikely to be applicable in Dartmouth Park Conservation Area.

Initial Assessment and Design

- PSV ducts should be as smooth, straight and vertical as possible, and must terminate at the ridge of the roof or at least 600 mm above any lower part of the roof. Ductwork must be properly sealed.

Mechanical Extract Ventilation (MEV)



In properties with good air tightness, a continuously operating ventilation system may be required. This can either be a single fan with ducts to the 'wet' rooms and the kitchen (centralised mechanical extract ventilation), or several fans running continuously (decentralised mechanical extract ventilation). Both types of systems can benefit from low power fans, to reduce the electricity use. Fresh air is supplied by trickle ventilators that may be humidistat controlled.

Initial Assessment and Design

- In order to reduce both noise and fan power, ductwork should be round in section, at least 150 mm in diameter, smooth internally, as straight as possible (with the minimum number of bends) and well sealed.
- An MEV system should always incorporate a boost mode, controlled by light switches or presence detectors, to expel moist air when kitchens and bathrooms are in use.
- MEV systems include air filters, which must be cleaned or replaced every six months.


Implementation

MEV systems must be installed and commissioned by specialists, who will also design the layout of any ductwork.



Section 4. Technical guidance on energy efficiency measures

Heat recovery room ventilators (HRRVs)

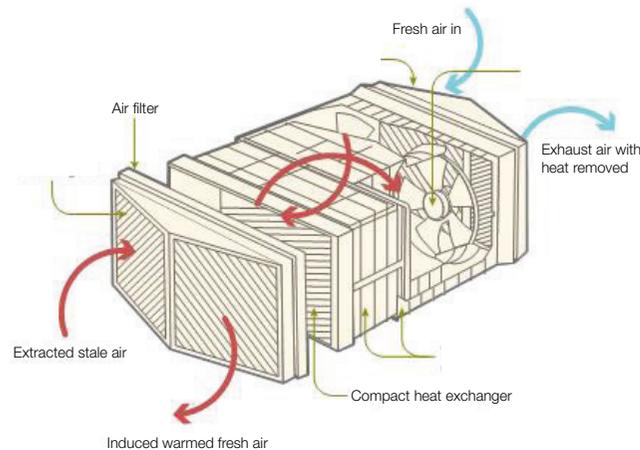

This system combines supply and extract ventilation into one unit serving a single room, with the added advantage that as the warm air is extracted, it is passed through a heat exchanger that removes some of the heat from the outgoing air and uses it to heat the fresh incoming air. Heat recovery efficiency

can be as high as 80% and fan power can be as low as 2 W.

HRRVs are especially useful if it is not practical, or too expensive, to install a whole-house system. However, HRRVs can only serve one room, so at least two are required in most houses.

HRRVs supply air to the same spaces that they extract from (usually kitchen and bathrooms), therefore in an airtight house they should be located appropriately to provide a sufficient supply of fresh air. 'Semi-ducted' HRRVs, which can extract stale air from one space and supply fresh air to one other adjacent space, are under development.

Mechanical ventilation with heat recovery (MVHR)



Whole house MVHR systems run continuously, extracting moist stale air from kitchens and bathrooms and supplying fresh air to living spaces and bedrooms, via ducts. The systems recover some of the heat from the extracted air and use it to pre-heat the incoming fresh air. Modern MVHR systems use energy efficient DC fan motors for low fan power, and incorporate plastic cross-flow heat exchangers to achieve heat recovery efficiencies as high as 90%.

MVHR systems deliver very good internal air quality, but they are very difficult to install in existing houses, because of the need to route supply or extract ductwork to most rooms. MEV (which requires less ductwork) or HRRVs will almost always be a better option.

Initial Assessment and Design

- The house must have a good standard of air tightness (air permeability of less than 3 m³/m²h @ 50 Pa, measured by a fan pressurisation test).
- The heat exchanger and all ductwork must be accommodated within the insulated envelope of the building, and not in an unheated space such as a loft or garage.
- In summer, the MVHR system should be switched off, and windows opened to provide ventilation instead. If the MVHR system is not switched off (perhaps because of external noise or air pollution) the heat recovery function must be disabled.
- MVHR systems include air filters, which must be cleaned or replaced every six months.

Implementation

MVHR systems must be installed and commissioned by specialists, who will also design the layout of any ductwork.

In order to reduce both noise and fan power, ductwork should be round in section, at least 150 mm in diameter, smooth internally, as straight as possible (with the minimum number of bends) and well sealed.



Section 4. Technical guidance on energy efficiency measures

4.5 Heating and hot water systems, including solar hot water

Since 1970, the percentage of British homes that have central heating has risen from 31% to over 90%. The vast majority of these homes use mains gas as their heating and hot water fuel. Although the majority still use a separate boiler and hot water cylinder ('system' boilers), around 40% of all gas central heating systems now have combination ('combi') boilers supplying both 'instant' domestic hot water and heating.

A heating system should always be sized to suit the heat loss (and where appropriate the hot water demand) of the home. The sizing of the boiler will depend on a number of factors including the floor area of your home, the level of insulation and the type of windows. An over-sized heating system will be less efficient than an appropriately sized one. If the home is to be insulated, and air tightness improved, the heat loss will be reduced – so building fabric improvements should always be carried out before the heating system is replaced (or at the same time), not subsequently.

Gas-fired central heating (GCH)

Initial Assessment

- GCH uses the least expensive domestic fuel (as of Spring 2012).
- There is a vast range of robust, well-tried component products and a well established installation, servicing and repair industry.
- Heat distribution is usually via radiators, which may be disruptive to install in a home that does not already have them.
- Condensing boilers require condensate drains connected to the drainage system. Most modern boilers also have fan assisted balanced flues that

must be connected horizontally to the exterior.

Design

- The guidance in Building Regulations Approved Document L (2010) and the Domestic Building Services Compliance Guide 2010 specifies a minimum seasonal efficiency of 88% for new or replacement condensing boilers, 78% for non-condensing boilers (where permitted) and 75% for range cookers.
- For larger houses the heating system should be split into two or more zones, so that each zone can be controlled separately according to the demands of that zone. Wireless, programmable room thermostats are available, and make retrofitting such improvements into existing homes much easier.
- When an existing gas-fired boiler is replaced the controls for the heat distribution system must be checked and if necessary upgraded. The controls must consist of: a programmer capable of controlling at least two heating periods during the day; a room thermostat that switches the boiler off when the internal temperature reaches the desired level; and thermostatic radiator valves (TRVs) on all radiators except any in the same room as the room thermostat. More sophisticated controls can also be added.
- When replacing a system boiler consider replacing the existing hot water cylinder. Older cylinders are often either not insulated (except perhaps by a DIY jacket) or inadequately insulated. Modern cylinders have the equivalent of 80 mm of foam insulation, and are able to supply hot water to the taps at mains pressure. Replacing the hot water cylinder may be necessary if a solar water heating system is going to be installed, as the solar system will require a dual-coil cylinder.

Implementation

If a condensing boiler is used (either combi or system) a compensator should be fitted to the boiler. There are two main types of compensator: weather and load. A weather compensator measures the outside temperature and modulates the boiler to keep it operating in the most efficient manner. A load compensator does the same thing, but measures the internal temperature



Section 4. Technical guidance on energy efficiency measures

instead.

Electric storage heating

Electric storage heating is sometimes used in smaller properties, or where main gas is not available. Electric storage heating uses electricity tariffs that use less expensive 'off peak' electricity during times of low demand (overnight) and make only limited use of more expensive electricity during periods of higher demand. The heaters store heat during the night and emit it during the day. Some modern units include resistance heating elements to boost heat output during on-peak periods if the stored heat is insufficient. Storage heaters rely on thermal 'drift' to distribute heat throughout the home. Hot water is usually provided by an off-peak immersion heater in a hot water cylinder, often with a second immersion heater for on-peak top-up (known as 'dual immersion').

Initial Assessment

- Less expensive to install but more expensive to run than GCH.
- Runs on less expensive off-peak electricity (typically the 'Economy 7' tariff available between midnight and 7 am).
- Modern storage heaters are slim and unobtrusive.
- Carbon dioxide emissions are relatively high because of the use of electricity; using one unit of electricity involves approximately two and half times more carbon dioxide being emitted than using one unit of mains gas.

Design

- On-peak room heaters, which use more expensive day-time electricity, are required for supplementary heating.
- An off-peak electricity tariff is required.
- Storage Heaters must be carefully positioned for good heat distribution.
- A large hot water cylinder (at least 210 litres) is required to ensure that sufficient hot water is stored overnight, to avoid on-peak top-up.

Solar water heating



A solar water heating system collects thermal energy from the sun via roof-mounted panels and uses the energy to pre-heat the domestic hot water supply, thus reducing heat demand from the boiler. With a conventional gas-fired central heating system a dual-coil hot water cylinder is used:

one coil pre-heats the water in the cylinder using solar energy, the second coil is connected to the boiler, which tops-up the temperature to the required level. Where the boiler is a 'combi' type (without a hot water cylinder) a solar pre-heat tank is used to store heat from the solar water heating system.

A well designed solar water heating system can meet most of a home's hot water demand in summer, and a small part of it in winter. Over the year, a solar system can usually deliver approximately half of the annual heat demand for hot water. Typically 1 m² of solar panel is required per bedroom in the house.

Solar water heating systems currently qualify for payments under the Renewable Heat Incentive (RHI), provided the home meets a minimum level of overall energy efficiency. The RHI solar thermal tariff is 8.5 p/kWh of heat generated, and payments continue for twenty years. A well designed 4 m² installation will generate approximately 400 kWh/m²/yr and thus deliver 1600 kWh/yr and qualify for £136/yr in RHI payments.

Initial Assessment

- A suitably oriented location with minimal visual impact on the building or area should be chosen. The optimum orientation is due south, tilted by between 20° and 50° from the horizontal. Poor orientation reduces overall efficiency, but systems still work well when oriented between south-east and south-west.
- It makes economic sense to consider the installation of solar water heating when the roof is being replaced or repaired.
- May be compatible with direct (electric immersion) or indirect (gas boiler) hot water cylinders, or a new, dual coil hot water cylinder may be required.



Section 4. Technical guidance on energy efficiency measures

- Solar water heating is not compatible with unmodified combi boiler systems unless a solar pre-heat tank is installed.

Design

Systems can be heavy when they are full of heat transfer medium (usually water or glycol); roof structures must be checked prior to installation, to ensure that they can carry the additional weight.

Implementation

Solar pre-heat tanks used with combi boiler systems must be heated to 60°C for one hour per week (during the evening) to minimise the risk of legionella infection.

Biomass heating

Biomass heating systems come in two main forms:

- **Wood burning stoves** that burn logs or pellets to heat a single room and can also be fitted with a back boiler to provide hot water.
- **Biomass boilers** that burn logs, pellets or wood chips to power a central heating and hot water system.

In both cases the carbon dioxide emitted during the combustion process is equal to that sequestered by the tree or plant during its lifetime. Carbon dioxide emissions from combustion are therefore considered to be neutralised and the technology secures significant carbon benefits over most other heating systems, provided that the fuel source is close to the point of heat generation.

Smoke Control Area restrictions

Despite the carbon benefits, biomass heating systems can generate emissions (notably nitrogen oxides and particulate matter (PM10 and PM2.5) that are detrimental to air quality and public health.

Since the Clean Air Act local authorities can declare the whole or part of the authority area a Smoke Control Area. The whole of Camden is a designated Smoke Control Area.

In a Smoke Control Area such as Camden, you are only legally allowed to burn “authorised fuels: anthracite, semi-anthracite, gas and low volatile steam coals on a fireplace or appliance that is not registered with the Department for Food and Rural Affairs (DEFRA) as “exempt” to burn other “non-authorised” fuels. The full list of authorised fuels is available here <http://smokecontrol.defra.gov.uk/fuels.php>

Logs, wood chips and wood pellets typical of most biomass heating systems are “non-authorised” fuels and therefore any biomass boiler or wood burning stove installed in Camden that proposes to use these fuels must be an “exempt appliance”.

“Clean burn”, “clean heat” and “low emission appliance” are marketing terms occasionally used by biomass stove and boiler manufacturers or distributors and provide no guarantee that appliances are exempt or suitable for exemption. A full list of exempt appliances are provided by DEFRA <http://smokecontrol.defra.gov.uk/appliances.php?country=e>

The DEFRA exemption certificate for the appliance will also identify the type of fuel that can be burned. Typically wood with a moisture content below 20% should be burnt in an exempt appliance.

Initial Assessment and Design

- If you have an existing working chimney this could be used with a new biomass installation (normally a wood burning stove) without the need for planning consent.
- Where you are considering using an existing chimney it is advisable to carry out a smoke test to confirm the integrity of the chimney. If the chimney is in poor condition it will need to be “lined”.
- Where there is no existing or working chimney then a new flue will be required and this may require planning permission (see Section 3.1 - What requires planning permission). A biomass boiler installation will almost certainly require a new flue.
- In all instances it is advisable to discuss your installation with neighbours,



Section 4. Technical guidance on energy efficiency measures

particularly if the chimney or flue exit point is upwind from a point of amenity, for example a terrace or bedroom.

- Consideration should also be given to the availability and source of the fuel supply permitted to be burnt within the appliance. The following website provides lists of local suppliers <http://www.bigbarn.co.uk/logpile/indexen.php>
- For biomass boilers adequate fuel storage space will be an important consideration.

Implementation

- Exempt appliances must either be installed by a Competent Person (in the case of biomass heating systems this must be a HETAS accredited installer) or the resident should seek Building Control approval to ensure compliance with Part J and, potentially, Part L of the Building Regulations. Part J deals with flue heights and sizes, ventilation rates and other safety issues relating to combustion appliances and Part L addresses the conservation of fuel and power in new and existing buildings where specific alterations are proposed.
- Wood fuelled boilers and stoves should be swept regularly to remove ash. Ash quantities are generally low (<1% of fuel volume).
- Biomass boilers often have built in self-cleaning systems. If there is no automatic ash cleaning system the installation will need to be periodically shut down for cleaning purposes. Ash build up will adversely affect combustion conditions and can result in boiler failure.

4.6 Photovoltaic electricity generation



Solar photovoltaic (PV) panels generate electricity from sunlight. Panels are usually roof-mounted but can also be fixed to a wall or be freestanding.

Solar slates or tiles which replace the existing roof covering and have a closely matching appearance are also available, for use where maintaining the original appearance of the roof is important. Solar slates and tiles are currently double the price of panels (2012), but are expected to fall to a

comparable price by 2020.

Solar PV systems generate DC (direct current) electricity, which is converted to AC (alternating current) electricity as used in homes by a device called an inverter. A well designed 1 m² PV array will generate approximately 750 kWh per year. The electricity can be used in the dwelling or exported to the national electricity grid for use elsewhere. Exported electricity offsets the mains electricity used at other times.

Solar PV systems currently have a high capital cost (approximately £3,000 per kWp in 2012) but the prices are falling. All PV generated electricity currently attracts payments from the Feed in Tariff (FiT), and there is an additional lower payment for exported electricity to the national grid. FiT payments are index-linked and continue for twenty-five years. The FiT is currently set at a level that will repay the capital cost of the system in about twenty years.

Initial Assessment and Design

- A suitably oriented location with minimal visual impact on the building or area should be chosen.
- Solar PV is very sensitive to orientation, and to shading by other buildings, chimneys, parapet walls, dormers, etc. The power output of poorly oriented and/or shaded installations is significantly reduced.
- It makes economic sense to consider the installation of solar pv panels when the roof is being replaced or repaired.



Section 4. Technical guidance on energy efficiency measures

- Installations require a lot of space: approximately 7 m² of well-oriented roofspace per kWp output. Few homes have space for more than a 2-3 kWp installation.

Implementation

- Although solar PV panels have a notional twenty-five year life, the inverters have only a ten year life, so the cost of at least one inverter replacement should be allowed for during the life of the system.

4.7 Heat pumps



A heat pump works by extracting heat from an external source and supplying it to the property for heating or domestic hot water. Heat can be extracted from the ground, from water or from the air.

The pump runs on electricity, and the aim is to extract more energy from the source than is required to run the pump. The ratio of heat extracted to

electricity used is called the coefficient of performance (CoP). A typical air source heat pump has a CoP of 2.5: i.e. it extracts 2.5 times as much energy as it uses. Ground-source heat pumps and water-source heat pumps have higher CoPs, but there is little scope for the use of these devices in densely developed urban areas.

Domestic Air sourced heat pumps usually use warm air for heat distribution. Ground and Water sourced heat pumps use wet heat distribution systems and are compatible with under-floor heating because the water temperature is lower than that delivered by a gas-fired boiler, and thus more heat emitting area is required.

A well designed heat pump supplying heat to a home will have about the same level of carbon dioxide emissions (associated with the electricity it uses) as a modern gas-fired boiler doing the same job, and similar fuel costs, so the main

application of heat pumps is for homes without access to mains gas (i.e. in rural areas or high-rise blocks).

Initial Assessment

- Heat pumps typically have running costs (and carbon dioxide emissions) similar to those of gas-fired heating systems, and lower than those of other electric heating systems.
- Ground sourced heat pumps require large areas of open land, or vertical boreholes, for ground heat exchangers. Where there is space for a borehole (e.g. in a back garden) there may be little or no access for the machinery to bore the hole and there may be underground services which restrict its location.
- Water sourced heat pumps require large bodies of water or flowing streams for water heat exchangers, to avoid ice build-up.
- Some Air sourced heat pumps with warm air heat distribution systems can provide comfort cooling in summer; the cooling option may be useful in future, in a warming climate, but it increases fuel use, fuel costs and carbon dioxide emissions.
- Beware of inflated CoP figures; quoted performance may be optimistic, and may not relate to performance in the UK.

Design

- The external heat exchangers of ASHPs are prone to frosting when the temperature is less than 4°C. Most systems used on-peak electricity for defrosting, and this significantly reduces their overall CoPs. External heat exchangers must be adequately sized and should be installed well away from buildings (not mounted on them) to ensure adequate air-flow.
- If a heat pump is used for water heating, a secondary heat source such as an electric immersion heater will be required to raise the water to an acceptable temperature.



Section 4. Technical guidance on energy efficiency measures

4.8 Domestic combined heat and power



Domestic CHP replaces a conventional gas-fired central heating boiler and generates electricity (2kW or less) as a by product of providing heat and hot water.

A mains gas-fired external combustion engine is used to drive a generator and the heat produced by this process is used to heat the home and/or provide hot water. Some systems also incorporate a small gas-fired boiler.

Domestic CHP units are slightly larger than conventional gas boilers, and can be mounted in kitchens, although because of noise manufacturers may recommend placing them in utility rooms or similar spaces. Domestic CHP units have high heat outputs and are therefore suitable for larger properties with high heat losses and/or hot water demand (either as a result of poor insulation or intensive, all-day occupation).

If a property is well insulated, with low heat and hot water demand, domestic CHP may not be suitable, because it will not run for long enough periods to generate significant amounts of electricity. Electricity is not generated when the system is not providing heat (including in summer).

Electricity generated by Domestic CHP systems may be used in the home or exported to the national electricity grid, and installations currently qualify for the Feed in Tariff (FIT).

Design

- The choice of products suitable for domestic installations is currently limited (Baxi EcoGen and E.On WhisperGen).
- DCHP installation may involve replacement of the existing electricity meter.

Appendices

A1 Council tenants and leaseholders

Camden Housing department is also seeking to improve the energy efficiency of its properties, and has the following key commitments:

- Make warmth affordable for all council tenants and leaseholders.
- Reduce the carbon footprint of council and leaseholder homes and mainstream sustainability measures in the management and maintenance of those homes.
- Make it easier for residents to reduce their carbon footprint.

Ways that it is doing this are:

- Installing cavity wall insulation: Camden aims to complete insulation to 95% of its cavity walled housing stock by December 2012.
- Providing Warm and Dry grants to vulnerable tenants to help with draught proofing, hot water tank insulation, loft insulation, improved ventilation.
- Installing green roofs to estate blocks wherever suitable save energy through cooling in hot weather and improving insulation in colder weather, as well as reducing the risk of flooding by absorbing rain water, and providing a safe habitat for a variety of wildlife.
- Installing water efficiency measures to reduce water use including over-bath showers wherever suitable, and also installing aerating taps, dual flush WCs and smaller baths.
- Installing 2,500 heat meters to residents on the district heating pool by March 2013 in order that they only pay for the heat they use.
- Developing a large scale combined Heat and Power system for the 1,500 residents in the Gospel Oak area using surplus heat from the Royal Free Hospital.
- Exploring how to replicate on a larger scale retrofitting projects in older houses, utilising experience gained from exemplar schemes such as the Bertram Street project in Dartmouth Park and specifically examining solid wall insulation and how this can best be implemented to street properties.

- Investigating opportunities for installing solar pv panels

Further information on energy efficiency for tenants and leaseholders is available on the Housing pages of the Councils website.

Council Leaseholders wishing to carry out energy efficiency measures themselves that require changes to the structure and roof of the building must seek written consent via their District Housing Office. Other alterations that do not involve changes to the structure may have unintended consequences on neighbours or to means of escape and so the District Housing Officer should be notified with details of the proposed works prior to them being carried out.

A2 Private Sector landlords and tenants

A number of grant schemes are available to private sector landlords to cover works to improve energy efficiency. Details of the eligibility criteria and works that they cover are available from Green Camden Helpline (0800 801738), or on the Council's website www.camden.gov.uk/green

- **Common Parts Lighting Grant** – To encourage landlords and freeholders to install low energy lighting in the common parts of buildings.
- **Decent Homes Standard** – To improve homes to Decent Homes Standard
- **Landlords Energy Efficiency and Insulation** – To encourage landlords to improve their properties by installing energy efficiency measures
- **ECO** - A grant to landlords of private residential property where the applicant receives relevant Council planning permission for the installation of environmentally beneficial installations.
- **Warmer Cheaper Greener Grant** (this is available to the private rented sector but is reliant on eligible tenants applying for the grant with written permission from the landlord) – To encourage installation and maintenance of energy efficiency measures which directly improve health, safety and well-being.

Appendices

A3 Sources of advice and information

English Heritage has set up a website exclusively focussing on the potential impacts of climate change on the historic environment, and ways to save energy if you own or manage an older home. The website includes research on the thermal performance of traditional sash windows (Improving the Thermal Performance of Traditional Windows, Glasgow Caledonian University, 2009), and detailed technical notes on specific energy efficiency measures. See www.climatechangeandyourhome.org

The Energy Saving Trust (EST) has a very extensive website which provides advice on energy saving methods in the home and beyond. The website has a grants and discounts database, a home energy checker, and gives links to community activities around the UK, courses for professionals and much more. EST also runs an Energy Efficiency Hotline tel: 0800 512 012. See www.energysavingtrust.org.uk

The Victorian Society has published the presentations given at its London conference on Energy Efficiency in Victorian and Edwardian homes on 11 November 2008. See www.victoriansociety.org.uk/advice/greening

The Sustainable Energy Academy is the charity which runs SuperHomes, an expanding network of over 100 energy-aware households open to the public between May and September. All have refurbished their old homes to high standards of energy efficiency achieving at least 60% reduction in carbon dioxide emissions. The network provides advice and information to would-be retrofitters and an opportunity to view completed projects. See www.superhomes.org.uk

The National Refurbishment Centre – examples of retrofitted properties. www.rethinkingrefurbishment.com/portal

The Building Conservation Directory is an online directory of companies and organisations, products and services ‘covering every aspect of the conservation, restoration and repair of the historic built environment’, as well as articles, publications and details of seminars and training events. See www.buildingconservation.com

The Department of Energy and Climate Change (DECC) website has information on climate change and the Green Deal. See www.decc.gov.uk

The Institute for Sustainability

RICKABY P A, WEDLAKE N and MELLOR A (editors, 2011) Building Opportunities for Business: Low Carbon Domestic Retrofit, a series of twelve guides published by the Institute for Sustainability, London. See <http://instituteforsustainability.co.uk/retrofitguides>.

Construction Products Association (2010) An Introduction to Low Carbon Domestic Refurbishment, Construction Products Association, London. See www.constructionproducts.org.uk.

Greenspec Website providing information on green building products, materials, design, energy and domestic retrofit. www.greenspec.co.uk

Dartmouth Park Conservation Area Advisory Committee provides local knowledge and expertise on matters relating to the Dartmouth Park Conservation Area, including providing advice to the Council on planning applications, policies and guidance that affects the character and appearance of the area. See <http://www.dartmouthpark.org>

Highgate Climate Action Network (HiCAN) is a community action network founded in April 2008. Its aim is to inform people about the threat of climate change. They hold public talks, discussion groups and workshops as well as lobbying on energy and climate change issues at a local and national level. See <http://hican.wikispaces.com/>

Transition Dartmouth Park is a newly formed Transition Initiative, covering Dartmouth Park and Highgate Newtown. Its stated aim is ‘to strengthen our community while improving our environment and cutting our use of fossil fuels, and also having some fun!’ See <http://transitiondartmouthpark.wordpress.com/>

Camden Council – www.camden.gov.uk

For guidance and advice on Planning, conservation area and listed buildings matters visit www.camden.gov.uk/planning. Contact the Duty Planner on 020 7974 4444 or e-mail the planning service at planning@camden.gov.uk

Appendices

Publications – available online

- **Retrofitting Planning Guidance** June 2011, provides information on the permissions required to install energy efficiency measures in homes across Camden.
- **Dartmouth Park Conservation Area Appraisal and Management Strategy** (2009)
- **Local Development Framework** – the framework against which the Council determines planning applications. Policies relevant to energy efficiency works to homes are:
 - DP22 - Promoting sustainable design and construction,
 - DP24 - Securing high quality design,
 - DP25 – Conserving Camden’s heritage.

Camden’s Planning Guidance (CPG) gives more information about how these policies will be applied, in

- CPG1 – Design
- CPG3 – Sustainability

Camden Building Control: Ensures that all building work, both public and private sector, meets the requirements of the Building Regulations, which include structural and fire safety, thermal and sound insulation, drainage, and access and facilities for disabled people. Find out more at www.camden.gov.uk/buildingcontrol Tel: 020 7974 6941

For information on what else the Council is doing to help residents with energy efficiency and environmental sustainability see www.camden.gov.uk/green. You can also contact the **Green Camden Helpline** on 0800 801738 for advice.

There is information on energy efficiency provided for Council tenants and leaseholders on the Council’s Housing web pages.

National Planning Policy Framework (March 2012) Contains 12 core principles which should underpin planning. Two of these that are particularly relevant to energy efficiency measures in homes in conservation areas are that planning should:

- support the transition to a low carbon future in a changing climate... encourage the re-use of existing resources, including conversion of existing buildings, and encourage the use of renewable resources (for example, by the development of renewable energy), and to
- conserve heritage assets in a manner appropriate to their significance, so that they can be enjoyed for their contribution to the quality of life of this and future generations.

A4 Information on suppliers, fitters, architects etc

The Sustainable Building Association (AECB) is a network of individuals and companies with a common aim of promoting sustainable building. It brings together builders, architects, designers, manufacturers, housing associations and local authorities, to develop, share and promote best practice in environmentally sustainable building.

The Royal Institute of British Architects website has advice on how to choose an architect, and has a directory of practices, chartered members and also a register of accredited conservation architects. Their ‘sustainability hub’ has news and articles about climate change and retrofitting. See www.architecture.com

The Institute for Sustainability Retrofit Guide 1 – An introduction to low carbon domestic retrofit. Appendix B explains the range of skills, training and accreditation schemes for all aspects of domestic retrofit. See <http://instituteofsustainability.co.uk/retrofitguides>.

The Microgeneration Accreditation Scheme has a website which allows you search for information on products and certificated installation companies for a range of microrenewable technologies. www.microgenerationcertification.org

Appendices

T-zero is a comparison website for retrofitting your home. You enter your home's details and the website generates retrofitting options, compares their effect in terms of carbon dioxide saving, financial payback period, best long term value etc, and then locates the suppliers, installers and retrofitters in your area. See www.tzero.org.uk

The Victorian Terrace Energy Reduction Initiative is a social enterprise based in North London dedicated to providing advice and assessments for reducing energy bills and cutting carbon dioxide emissions for Victorian and Edwardian houses. It is developing a list of local tradespeople, with recommendations by those who have used them. VICTERI also carries out draughtproofing work to windows and promotes solar renewables. See www.VICTERI.org.uk

Glossary

A5 Glossary

Affordable warmth: Access to an acceptable standard of heating and hot water at a cost not exceeding 10% of household income (the opposite of Fuel Poverty – see below).

Air permeability: A measure of the air tightness of building fabric in m³ of air leakage per m² of building envelope per hour, at 50 Pa excess pressure (m³/m²h @ 50 Pa).

Air tightness: The resistance of building fabric to adventitious or uncontrolled air leakage.

Building fabric: The external envelope of a building - floors, walls, roof, windows, doors, rooflights etc.

Building Research Establishment Domestic Energy Model (BREDEM): A calculation method for estimating the annual energy requirements for space heating, water heating, cooking, lighting and electrical appliances within a self-contained dwelling, and for estimating the savings resulting from improvement measures.

Carbon Emission Reduction Target (CERT): A programme of energy efficiency improvements carried out by energy supply companies in their customers' buildings as part of the 'Supplier Obligation' imposed by the Government and regulated by Ofgem.

Carbon neutrality: net zero carbon dioxide emission achieved by balancing emissions associated with mains energy use with an equivalent amount of zero emission energy (e.g. electricity generated locally by PV) supplied to the national grid.

Cavity Insulation Guarantee Agency (CIGA): An organisation that provides independent twenty-five year guarantees for cavity wall insulation fitted by registered installers in the UK and Channel Islands.

Climate change adaptation: Adapting buildings to anticipated climate change by means of measures such as solar shading (to mitigate overheating) and sustainable drainage (to improve flood resilience).

Code of Practice for Energy Advice: A Code of Practice (CoP) for all organisations/individuals that provide domestic energy efficiency advice that is specific to individuals and their circumstances. The CoP was created by the Energy Efficiency Partnership for Homes (EEPH) and is managed by the Energy Saving Trust (EST). The CoP consists of a set of core standards related to the quality of advice and information provided, the training and development of advisers, customer access, quality assurance and service improvements.

Community Energy Saving Programme (CESP): A programme of local, community-wide energy efficiency improvements carried out by energy supply companies in partnership with local authorities, as part of the 'Supplier Obligation' imposed by the Government.

Competent Persons Scheme (CPS): A scheme that allows trained and accredited individuals to self-certify that their work complies with certain specified parts of the Building Regulations, as an alternative to submitting a Building Notice, making an application to a Building Control Body or employing an Approved Inspector.

Cross-ventilation: Ventilation of a room, or across a floor within a building, that is enabled by arranging ventilation openings on opposite sides of the space, so that fresh air is admitted on one side and stale air is emitted on the other side, driven by wind pressure.

Decentralised energy: Small, local, renewable energy sources e.g. wind farms, community scale CHP, domestic scale solar thermal and photovoltaic arrays.

Department of Energy and Climate Change (DECC): A Government department established to take the lead in tackling the challenge of climate change and moving the UK towards a low carbon economy.

Domestic Energy Assessor (DEA): An accredited energy assessor who can issue Energy Performance Certificates (EPCs) for existing self-contained dwellings following an on-site survey.

Energy Company Obligation (ECO): An obligation to be placed by the Government on fuel companies to invest in the energy efficiency of buildings; from autumn 2012 (ECO will replace CERT and CESP, and complement the Green Deal).

Energy Performance Certificate (EPC): A certificate issued following an energy assessment of a building by an accredited assessor (OCDEA for new dwellings, DEA for existing dwellings, CEA or LCEA for non-domestic buildings). The EPC evaluates the energy performance of the dwelling in terms of an Energy Rating on an A to G scale, and identifies potential improvement measures.

European Regional Development Fund (ERDF): A fund allocated by the European Union for the period 2007 – 2013 to promote regional development through measures such as creating sustainable jobs, stimulating economic growth, enhancing access to transport and telecommunications, etc.

External shading: Integrated or building mounted solar shading devices on the outside of a building, including extended eaves, brise soleil, etc.

Feed in Tariff (FiT): a funding scheme that provides payments for electricity that is generated from small scale zero-carbon sources such as solar photovoltaic (PV) systems and wind turbines. The FiT is funded by a levy on all fuel bills.

Fuel poverty: the condition of a household that must spend more than 10% of its income on fuel in order to obtain an acceptable standard of space heating and hot water. Fuel Poverty is the opposite of Affordable Warmth. (definition currently under review by government)

Green Deal Adviser (GDA): An accredited adviser who can visit a dwelling, assess its energy performance, evaluate improvement options and provide the occupants with advice about improving energy efficiency of the dwelling.

Green Deal Code of Practice (GDCoP): a public document containing standards and requirements to regulate the behaviour of GDAs, GDPs, suppliers and installers working under the auspices of the Green Deal, in order to provide consumer protection.

Green Deal Provider (GDP): An organisation that arranges the funding and installation of energy improvement measures for dwellings, as recommended by Green Deal Advisers.

Glossary

Green Deal Publicly Accessible Specification (PAS): A published generic specification (BSI PAS 2030) to which services provided and energy improvement measures installed under the auspices of the Green Deal must conform.

Green Deal: The Government's principal incentive scheme for promoting improvement of the energy efficiency of existing buildings, funded by commercial investment which is subsequently recovered by charges levied on the fuel bills associated with the buildings that are improved.

Green Guide to Building Specification: A guide to the relative environmental impacts of the construction materials commonly used in six different generic types of buildings; in excess of 1500 specifications are outlined in the guide, which is published by BRE Ltd.

Green House Gas: the gases whose increased concentration in the atmosphere promotes warming and consequent climate change; the principal Green House Gas is carbon dioxide, others include methane, nitrous oxide, ozone and water vapour.

Golden Rule: A principle associated with the Green Deal, under which PAYS charges applied to fuel bills and paid by householders must not exceed the expected fuel cost savings associated with installed energy improvement measures.

Home Energy Advisor (HEA): An accredited HEA is a DEA who also provides energy efficiency advice to households about measures to reduce energy use, covering changes that could be made to the dwelling and behavioural changes.

Home Energy Master Plan: A comprehensive evaluation of a dwelling to help the occupier understand the best options for making it warmer, reducing its energy bills and reducing carbon dioxide emissions.

Interstitial Condensation: Condensation that forms when warm, moist air from within the building penetrates into the building fabric (walls, roof or floor) and meets a cold surface, potentially leading to damage or rotting of the building fabric or structure.

Life cycle assessment (LCA): An assessment of the environmental impacts associated with all the stages of a product's life from raw material extraction, materials processing, manufacture, distribution, use, repair and maintenance, and disposal or recycling (i.e. 'from cradle to grave'). Sometimes also known as Whole Life Assessment.

Local renewable energy systems: Renewable energy systems that are installed close to the buildings they serve, but not within their curtilages, i.e. off-site.

Low carbon retrofit: Refurbishment of an existing building with a view to significant reduction in the carbon dioxide emissions associated with energy use.

Microgeneration Certification Scheme (MCS): A product and installer certification scheme that certifies microgeneration technologies that are used to produce electricity and heat from renewable sources (photovoltaics, solar thermal, micro wind turbines, heat pumps – ground and air source, biomass, CHP and micro hydro).

National Home Energy Rating (NHER): A BREDEM-based domestic energy rating based on a scale of 0 to 20 (20 being the best), which is similar to the SAP energy rating but takes account of all energy uses (i.e. heating, water heating, cooking, lighting and the use of appliances) and the location and local exposure of the dwelling, all under SAP standard occupancy. The NHER also estimates annual fuel use, fuel costs and carbon dioxide emissions under specified occupancy.

On-site renewable energy systems: Renewable energy systems that are installed within the curtilage of a building (e.g.: on the roof, in the plant room, or elsewhere on site).

Passive House Planning Package (PHPP): A workbook-based performance assessment tool produced by the PassivHaus Institut to assist the design and certification of dwellings to meet the PassivHaus Standard.

Passive House Standard: A performance standard for very energy efficient new dwellings, developed and certified by the PassivHaus Institut and widely taken up across western Europe.

Pay As You Save (PAYS): A funding scheme under which a loan to finance low carbon retrofit is repaid by means of a charge attached to the fuel bills of the dwelling that is improved; the charge remains with the dwelling, even if the occupants change, and is repaid over a period of up to twenty-five years. The 'Golden Rule' is that PAYS charges must not exceed the fuel cost savings expected to arise from the installed improvements.

Pay-back time: The time taken for the capital cost of low carbon retrofit work to pay for itself through fuel cost savings.

Post-occupancy monitoring and evaluation (POE): Monitoring of the performance of a dwelling, after retrofitting and occupation, to evaluate the effectiveness of the improvements.

Rainwater harvesting system: System that collects rainwater falling within the curtilage of a dwelling, for use in the home or garden.

Reduced Data Standard Assessment Procedure (RDSAP): A 'stripped down' version of the Standard Assessment Procedure (SAP) energy rating in which data items that are difficult or time-consuming to determine during a survey (e.g. ground floor insulation, window areas) are replaced by 'least unlikely' default data, in order to reduce the cost of energy surveys.

Renewable Heat Incentive (RHI): a funding scheme that provides payments for heat that is generated from small scale low or zero carbon sources such as solar thermal panels, biofuel boilers, geothermal energy and some types of heat pumps. The RHI is funded by a levy on all fuel bills.

Renewable Heat Incentive Premium Payment: A direct payment from the Government to subsidise heat that is generated from small scale low or zero carbon sources such as solar panels, biofuel boilers, geothermal energy and some types of heat pumps, in return for feedback on system performance; this is an interim subsidy that will apply only until the RHI is implemented for domestic buildings in autumn 2012.

Seasonal efficiency: the seasonal efficiency of a heating boiler is the average efficiency with which energy in the fuel is converted to heat in the building, over the whole heating season; it is usually less

Glossary

than the manufacturer's claimed efficiency because the boiler is less efficient under partial load (e.g. during warmer weather in spring and autumn).

Simple pay-back: a method of assessing the cost effectiveness of a low carbon retrofit measure by evaluating the time taken for the capital cost of low carbon retrofit work to pay for itself through fuel cost savings.

Solid wall insulation (SWI): Insulation that is installed internally (IWI) or externally (EWI) to solid external walls in order to improve their thermal performance.

Solid Wall Insulation Guarantee Agency (SWIGA): An organisation established to develop an independent guarantee and associated industry quality and standards infrastructure for solid wall insulation (EWI and IWI).

Standard Assessment Procedure (SAP): A BREDEM-based domestic energy rating based on the annual fuel cost for heating, hot water and fixed lighting only, under standard occupancy and in a standard location, expressed on a scale of 1 to 100+.

Stratification: The tendency of air in a closed space, or water in a tank, to form layers of different temperatures, with the warmest at the top.

Sustainable urban drainage system (SUDS): A combination of water management practices and control measures designed to drain away surface water in a more sustainable way than conventional mains drainage methods. SUDS techniques include: permeable paving, soakaways, green roofs, swales, site ponds, infiltration ditches, balancing ponds, wetlands etc.

Thermal bridge: an area of building fabric that is less well insulated than surrounding areas, and therefore allows a greater rate of heat loss, as a result of the construction of the building; thermal bridges typically occur where structural members penetrate through insulation layers, at corners and junctions between elements (i.e. between floors, walls and roofs) and around openings such as windows and external doors.

Thermal comfort: perceived comfort in relation to environmental variables including air temperature and the radiant temperatures of surrounding surfaces, as well as personal factors including insulation by clothing, and metabolic heat generation.

Thermal transmittance (also known as U value): the capacity of a construction to transmit heat, measured in Watts per square metre of the construction per unit temperature difference across the construction (W/m²K); the lower the U value the better.

Thermography: The use of infrared thermal imaging equipment to investigate the thermal performance of building envelopes, usually to detect and evaluate thermal bridges and air leakage.

Trickle ventilator: a device for admitting a continuous trickle of fresh air into a home, to balance the stale air extracted by intermittent extract ventilation fans, passive stack ventilation or mechanical extract ventilation; trickle ventilators are usually fitted in window frames but can also be fitted through walls and have humidity-sensitive inlets.

U value: see Thermal transmittance.

Vapour balanced construction: a form of construction that allows water vapour to pass through the building fabric from inside to outside, but inhibits its passage in the opposite direction, while maintaining air-tightness; sometimes erroneously called 'breathing' or 'breathable' construction.

Vapour Barrier: a water-resistant membrane inserted into the construction of an exposed, insulated floor, wall or roof (always on the warm side of the insulation) to prevent the passage of moisture through the construction.

Warm Front: A Government-funded scheme that provides insulation and heating grants for low-income households that are in receipt of certain income-related benefits, in order to improve the energy efficiency of their dwellings and thus alleviate fuel poverty.

Waste water heat recovery: A system that uses a heat exchanger to recover heat from waste water from showers, baths, washing machines and dishwashers and return it to the domestic hot water cylinder in order to reduce the energy requirement for water heating.

Whole life assessment (WLA): An assessment of the environmental impacts associated with all the stages of a product's life from raw material extraction, materials processing, manufacture, distribution, use, repair and maintenance, and disposal or recycling (i.e. 'from cradle to grave'). Sometimes also known as Life Cycle Assessment.

Whole life costing (WLC): An assessment of the total cost of a product through all the stages of a its life, including costs associated with raw material extraction, materials processing, manufacture, distribution, use, repair and maintenance, and disposal or recycling (i.e. 'from cradle to grave').

As with any building project, we recommend that independent professional advice is sought before any works begin. Camden Council does not accept liability for loss or damage arising from the use of this guidance.

Picture credits

P23	Baxi EcoGen Domestic combined heat and power (DCHP)	Baxi
P24	Installing insulation between timber floor joists (alternative)	John Willoughby
P25	Insulation installed between and over ceiling joists in loft	ECD Architects
P25	Schematic of flat roof insulation, showing continuity with EWI and air barrier	ECD Architects
P26	Installing insulation between timber floor joists	LowEnergyHouse.com
P27	Concrete floor being installed over floor insulation	John Willoughby
P28	Internal insulation around window	ECD Architects
P31	Internal Draught lobby	EcoRefurbishment
P33	Passive stack ventilation	John Willoughby
P34	Schematic for heat recovery room ventilator (HRRV)	John Willoughby
P34	Mechanical ventilation with heat recovery (MVHR) unit	John Willoughby
P36	Solar thermal panels on roof	EcoRefurbishment
P38	Solar PV panels on roof	EcoRefurbishment

Placeshaping Service
Camden Council
6th Floor
Town hall extension
Argyle Street
WC1H 8EQ

Tel: 020 7974 4444
Contact us: camden.gov.uk/planning

**If you have any questions or comments on this please contact us on
020 7974 4444**

Published December 2012. Produced by the communications team (design, print and copy) 2172.3 10/11 020 7974 1985